




The 2411 is a bipolar integrated circuit designed for telephone tone ringer.

Features

- * Designed for telephone bell replacement
- * Adjustable 2-tone frequency
- * Hysteresis circuit prevents false triggering and rotary dial "Chirps"
- * Adjustable for reduced supply initiation current

Package: DIP-8

Pin No	Name	Function
1	VCC	Power supply (+)
2	RSL	Resistor select
3	LFI	Low freq osc input
4	LFO	Low freq osc output
5	GND	Ground (-)
6	HFO	High freq osc output
7	HFI	High freq osc input
8	OUT	Signal output

ABSOLUTE MAXIMUM RATING

Parameter	Symbol	Rating	Unit
DC Supply Voltage	Vcc	36	V
Power Dissipation	Pd	450	mW
Operating Temperature	Topr	-25~+75	°C
Storage Temperature	Tstg	-55~+125	°C


ELECTRICAL CHARACTERISTICS VCC=24V, Ta=25°C (Unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Operating Supply Voltage	Vcc				36	V
Initiation Supply Voltage (note 1)	Vsi		17	19	21	V
Initiation Supply Current	Isi	Vcc=Vsi, No Load, Rsl=6.8k	1.4	3.5	4.2	mA
Sustaining Voltage (note 2)	Vsus		9.7	11	13	V
Sustaining Current	Isus	Vcc=Vsus, No Load	0.2	1.4	2.5	mA
Output High Voltage	VOH	Vcc=21V, IOH=15mA	17	19	21	V
Output Low Voltage	VOL	Vcc=21V, IOL=15mA			1.6	V
High Frequency 1	FH1	R3=191K, C3=6800pF	461	512	563	Hz
High Frequency 2	FH2	R3=191K, C3=6800pF	576	640	703	Hz
Low Frequency	FL	R2=165K, C2=0.47uF	9	10	11	Hz

Note:

1. initiation supply voltage (Vsi) is the supply voltage required to start the tone ringer oscillating.
2. sustaining voltage (Vsus) is the supply voltage required to maintain oscillation.

APPLICATION CIRCUIT

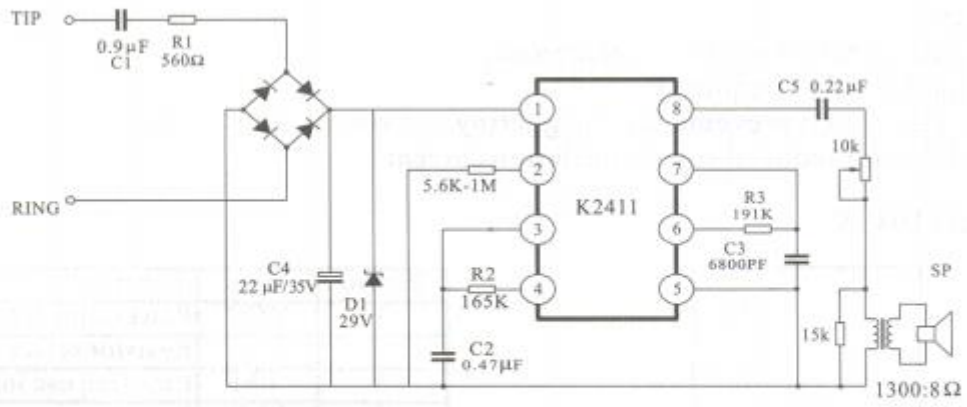

$$F_L = 1/1.289R2C2$$

$$F_{H1} = 1/1.504R3C3$$

$$F_{H2} = 1/1.203R3C3$$