


# КАБЕЛЬНЫЙ ВВОД



- Material: PA
- Seal piece: NBR & EPDM
- Protection class to: IP68  
(tighten part, with O-seal ring)
- Temperature range:  
static state -40°C to 100°C,  
short time to 120°C  
motion state -20°C to 80°C,  
short time to 100°C

## Dimension

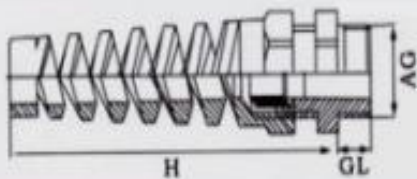

## PG series Metric type thread cable glands-breakproof

Thread	∅ mm	GLmm	Hmm	W mm	AGmm
PG7	3-6.5	8	65	15/16	12
PG7	2/5	8	65	15/16	12
PG9	4/8	8	70	19/20	16
PG9	2/6	8	70	19/20	16
PG11	5/10	8	78	22	18
PG11	3/7	8	78	22	18
PG13.5	6/12	9	90	24	20
PG13.5	5/9	9	90	24	20
PG16	10/14	10	100	27	22
PG16	7/12	10	100	27	22
PG21	13-18	10	112	33/34	28
PG21	9/16	10	112	33/34	28

## PG series cable glands -breakproof

Thread	∅ mm	GLmm	Hmm	W mm	AGmm
PG7	3-6.5	8	65	15/16	12.5
PG7	2/5	8	65	15/16	12.5
PG9	4/8	8	70	19/20	15.2
PG9	2/6	8	70	19/20	15.2
PG11	5/10	8	78	22	18.6
PG11	3/7	8	78	22	18.6
PG13.5	6/12	9	90	24	20.4
PG13.5	5/9	9	90	24	20.4
PG16	10/14	10	100	27	22.5
PG16	7/12	10	100	27	22.5
PG21	13-18	10	112	33/34	28.3
PG21	9/16	10	112	33/34	28.3