

Voltage Controlled Oscillator

ROS-369-319+

5V Tuning for PLL IC's 370 to 400 MHz

Features

- linear tuning characteristics
- low phase noise
- low pulling
- aqueous washable

Applications

- wireless communications
- PLL circuitry
- base station



CASE STYLE: CK605

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications

MODEL NO.	FREQ. (MHz)		POWER OUTPUT (dBm)	PHASE NOISE dBc/Hz SSB at offset frequencies, kHz				TUNING					NON HARMONIC SPURIOUS (dBc)	HARMONICS (dBc)		PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	DC OPERATING POWER	
	Min.	Max.		Typ.	1	10	100	1000	VOLTAGE RANGE (V)	SENSITIVITY (MHz/V)	PORT CAP (pF)	3 dB MODULATION BANDWIDTH (MHz)		Typ.	Typ.			Typ.	Typ.
ROS-369-319+	370	400	+3	-90	-117	-138	-159	0.5	5	15	50	70	-90	-25	-18	0.1	1	5	25

Pin Connections

RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	7V
Absolute Max. Tuning Voltage (Vtune)	7V
All specifications	50 ohm system


Permanent damage may occur if any of these limits are exceeded.

Tape & Reel: F37


13" Reels with 20, 50, 100, 200, 500 devices

Environmental Ratings: ENV65

Outline Drawing

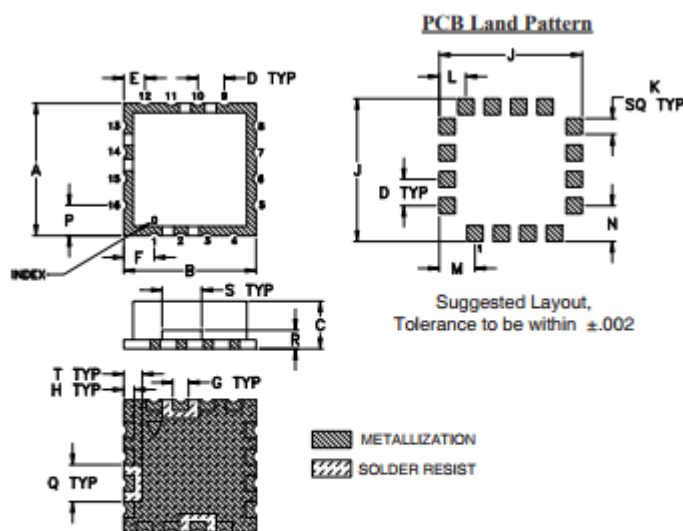

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

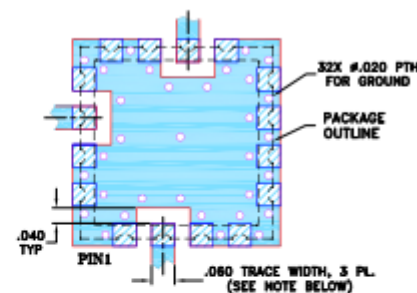

NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE BOTTOM IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0


Performance Data & Curves*

ROS-369-319+


V TUNE	TUNE SENS (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)			Icc (mA)	HARMONICS (dBc)			FREQ. PUSH (MHz/V)	FREQ. PULL (MHz)	PHASE NOISE (dBc/Hz) at offsets				FREQ OFFSET (KHz)	PHASE NOISE at 385 MHz (dBc/Hz)
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C		F2	F3	F4			1kHz	10kHz	100kHz	1MHz		
0.00	21.39	344.4	342.2	340.8	2.34	2.20	1.69	19.18	-20.1	-38.7	-35.0	1.16	0.24	-86.7	-112.2	-132.6	-152.6	1.0	-90.37
0.25	19.22	349.5	347.6	346.0	2.40	2.28	1.89	19.31	-21.3	-36.6	-34.0	1.21	0.18	-87.6	-114.0	-134.5	-154.2	2.0	-99.89
0.50	18.16	354.1	352.4	350.8	2.45	2.33	2.01	19.42	-22.4	-35.3	-33.6	1.23	0.13	-89.2	-115.4	-136.1	-155.8	3.5	-107.40
0.75	17.68	358.5	356.9	355.4	2.50	2.39	2.08	19.51	-23.4	-34.4	-33.2	1.37	0.07	-88.9	-116.4	-137.2	-157.3	6.0	-112.41
1.00	16.84	362.8	361.3	359.8	2.56	2.50	2.12	19.53	-23.8	-34.5	-32.7	1.39	0.06	-88.7	-116.5	-137.5	-157.5	8.5	-116.97
1.25	16.18	367.2	365.5	364.0	2.66	2.63	2.15	19.53	-24.0	-34.8	-32.3	1.23	0.07	-88.3	-116.2	-137.1	-157.2	10.0	-118.57
1.50	15.78	371.4	369.6	368.1	2.77	2.73	2.19	19.53	-24.0	-35.5	-32.0	1.12	0.12	-88.2	-115.9	-137.0	-156.7	20.8	-125.97
1.75	15.58	375.5	373.5	372.1	2.87	2.80	2.18	19.52	-24.0	-36.2	-31.8	1.05	0.16	-89.4	-116.2	-137.6	-157.5	35.5	-130.80
2.00	15.52	379.5	377.4	376.1	2.96	2.83	2.17	19.51	-24.0	-37.0	-31.4	0.98	0.13	-89.7	-117.8	-139.0	-158.8	60.7	-134.87
2.25	15.47	383.4	381.3	380.0	3.06	2.84	2.17	19.51	-24.2	-38.0	-31.5	0.92	0.08	-90.7	-118.7	-140.1	-160.3	86.7	-138.62
2.50	15.37	387.2	385.2	383.9	3.16	2.83	2.16	19.51	-24.5	-38.6	-31.4	0.90	0.08	-89.9	-118.6	-139.8	-159.4	100.0	-139.84
2.75	15.30	391.0	389.0	387.7	3.24	2.83	2.18	19.51	-24.9	-39.2	-31.6	0.91	0.14	-88.9	-118.0	-139.2	-159.3	148.1	-143.32
3.00	15.21	394.8	392.8	391.5	3.28	2.82	2.17	19.52	-25.2	-39.4	-31.8	0.94	0.19	-90.6	-116.8	-138.0	-157.9	177.0	-144.75
3.25	15.10	398.5	396.7	395.3	3.29	2.79	2.18	19.53	-25.4	-39.7	-31.9	0.98	0.20	-88.7	-115.9	-137.0	-156.9	211.6	-146.39
3.50	15.04	402.2	400.4	399.1	3.35	2.75	2.16	19.54	-25.7	-40.0	-31.7	1.03	0.19	-88.7	-115.0	-136.4	-156.3	302.4	-149.32
3.75	14.85	405.8	404.2	402.8	3.45	2.73	2.18	19.56	-25.9	-40.3	-31.6	1.07	0.16	-88.8	-115.0	-136.2	-156.1	361.5	-150.42
4.00	14.66	409.3	407.9	406.5	3.57	2.72	2.22	19.57	-26.2	-40.3	-31.6	1.11	0.12	-88.5	-114.8	-136.1	-156.1	507.5	-153.86
4.25	14.40	412.8	411.6	410.1	3.70	2.73	2.26	19.59	-26.6	-39.9	-31.7	1.15	0.06	-87.9	-114.9	-136.0	-156.0	606.7	-155.55
4.50	14.13	416.3	415.2	413.7	3.78	2.72	2.31	19.60	-27.0	-39.6	-31.9	1.18	0.03	-88.6	-115.2	-136.1	-156.0	851.6	-158.40
5.00	13.52	423.2	422.1	420.6	3.70	2.67	2.34	19.63	-27.8	-38.0	-32.1	1.24	0.15	-88.4	-115.3	-136.3	-156.2	1000.0	-159.76

*at 25°C unless mentioned otherwise


ROS-369-319+
Frequency and Tuning Sensitivity

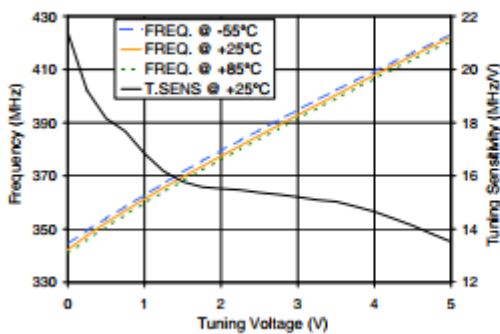


ROS-369-319+
Power Output

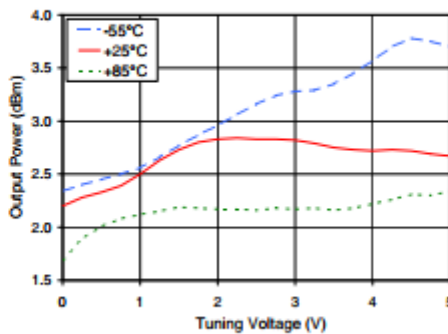


ROS-369-319+
Harmonics Level

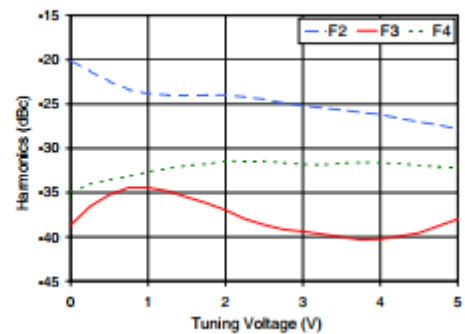

ROS-369-319+
Frequency Pulling & Pushing (Vcc ± 5%)

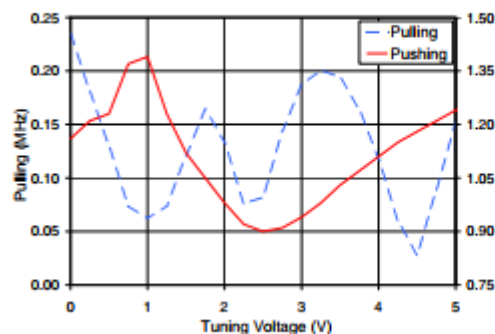

ROS-369-319+
Phase Noise Vs. Tuning Voltage

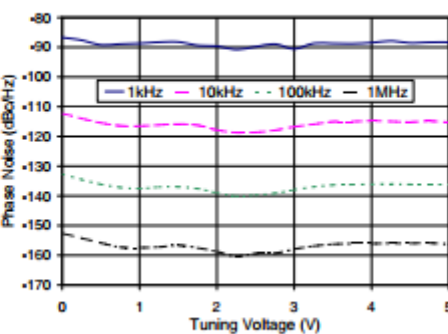

ROS-369-319+
Phase Noise

