
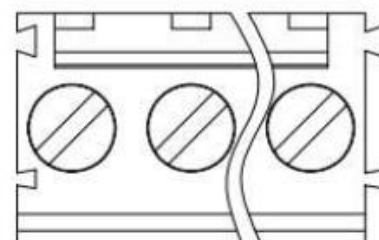
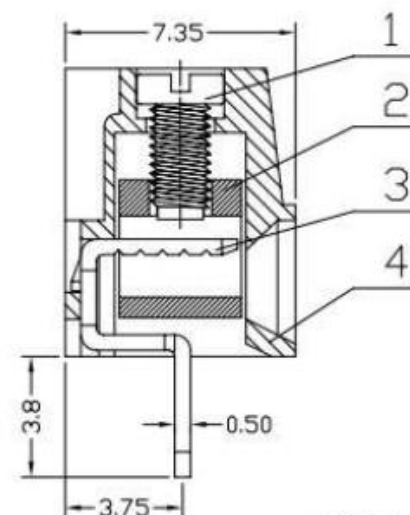


序号/Rev.No.	名称/Title	文件编号/File No.
1	XY303一字螺钉 (与XY302一字螺钉共用)	QJ/XYT-2148101
2	XY303铜方块 (与XY302铜方块共用)	QJ/XYT-2148102
3	XY303V 端子 (与XY302V端子共用)	QJ/XYT-2148104
4	XY303 塑件	QJ/XYT-2149101

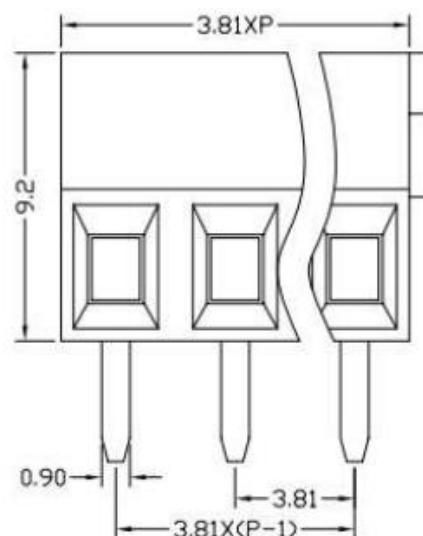

300V 10A 26-16AWG 1.0mm²
Poles: 2P&3P-24P
Pitch: 3.81mm(.150")

Materials

Housing: PA66(UL 94V-0)

Wire Cage: Brass, Nickel Plated

Solder Pin: Brass, Tin Plated

Screw: M2, Steel(A3), Zinc Plated

Torque: 0.2N.m

设计/Designed by	绘图/Drawing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance	
 新莱亚电子 XINLAIYA ELECTRONIC CO., LTD				h: 2	h: 2
				h: 1	h: 1
				h: 0.5	h: 0.5
				h: 0.2	h: 0.2
图名/Title: XY303V 产品图 文件编号/File No.: QJ/XYT-2249100 页序/Sheet:				单位/Unit: mm	
备注/Remark:					