
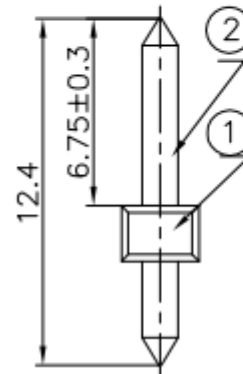


REVISION RECORD				
REV	ECD	DESCRIPTION	DRFT	DATE
△		PA66+25%GF,替原PBT料	Haoy	05/10/11

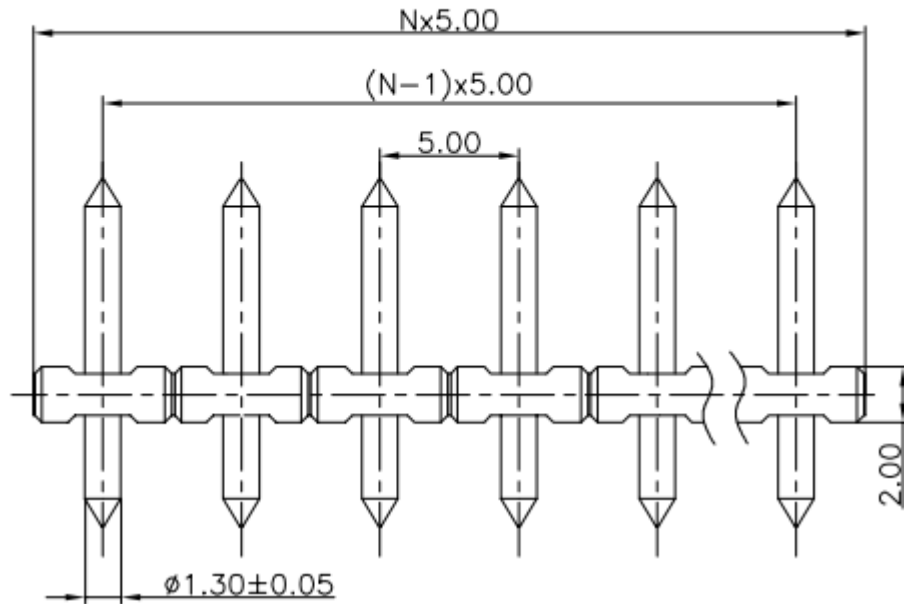

Material

Pin header: Brass, Tin plated
Housing: PA66+25%GF, UL94V-0

Electrical


Rated voltage: 300V
Rated current: 10A
Contact resistance: 20mΩ
Insulation resistance: 5000MΩ/1000V
Withstanding voltage: AC1500V/1Min

Mechanical

Temp, Range: -40° C~+105° C
MAX Soldering: +250° C, for 5 Sec

Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						—
to	over	to	over	to	over	to	—	
6	6 to 10	6	6 to 10	10 to 24	30 to 90	90 to 200	200 to 480	∩ □
	±0.10	±0.15	±0.25	±0.1	±0.2	±0.3	±0.5	±0.7



2	DG332-Pin header	4014B00010(H)	XX	Brass	Tin plated
1	DG332J-5.0-XXP-1Y-00A-Housing	014A0YXXA(H)	1	△ PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DETAILED LISTS	MM (INCH)	DFTD: Haoyh	DATE: 05/12/05	宁波海正电子有限公司 DEGSON ELECTRONICS CO., LTD.	
	TOLERANCES EXCEPT AS NOTED	CHKD:	DATE:		
	MM	MFO:	DATE:		
	.0	APPVL:	DATE:		
	.00	MATERIAL:			
ANGLES ± 1°	G.E.:	NAME: DG332J-5.0-XXP-1Y-00A(H)		DRAWING NO. DG332J-5.0-E05	
THIRD ANGLE PROJECTION	FINISH:	SCALE: 1:1		SIZE: A3	REV: T1
		DO NOT SCALE DRAWING		SHEET 1	OF 1