


ORDERING CODE 订购代码

HLS-4453(18F) - DC12V - 4C - P - L

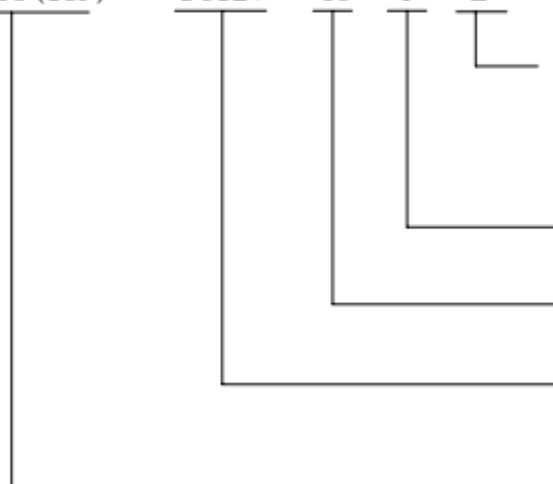

NIL...STANDARD  
 L ....LED  
 T ....TEST BUTTON  
 A ....LED + TEST BUTTON

TERMINAL TYPE  
 NIL...PLUG IN P...PBC

CONTACT FORM  
 4C:4FORM C

NOMINAL VOLTAGE  
 DC5V,DC6V,DC12V,DC24VDC48V  
 AC6V,AC12V,AC24V,AC48V,AC120V,AC240V

TYPE

**CONTACT DATA 触点参数:**

Contact Form	触点形式	4C	
Contact Material	触点材料	Ag Alloy	
Contact Ratings	触点负载	5A 240VAC/30VDC	
Max Switching Voltage	最大转换电压	250VAC/30VDC	
Max Switching Current	最大转换电流	7A	
Max Switching Power	最大转换功率	1750VA/210W	
Initial Contact Resistance	接触电阻 (首次)	100mΩ Max	at 6VDC 1A
Life Expectancy Electrical	电气寿命	100,000	Operations(rated load)
Life Expectancy Mechanical	机械寿命	10,000,000	Operations(no load)

**GENERAL DATA 一般参数:**


Insulation Resistance	绝缘阻值	100MΩ min at500VDC	
Dielectric Strength Between Open Contacts	触点间耐压	1000VAC 50-60HZ (1 minute)	
Dielectric Strength Between Contacts And Coil	触点与线圈间耐压	1500VAC 50-60HZ (1 minute)	
Operate Time	吸合时间	25ms max	
Release Time	释放时间	25ms max	
Ambient Temperature	环境温度	-40℃ to+70℃	
Shock Resistance 冲击	Malfunction	动作极限	20G
	Destruction	破坏极限	100G
Vibration Resistance	振动	10-55Hz,1.5mm double amplitude	
Ambient humidity	湿度	40-85% RH	
Weight	重量	Approx 32g	
Safety Standard	安全标准	CQC	

**COIL DATA 线圈参数: (@20°C)**



Rated Voltage 额定电压 (V)	DC Coil 直流线圈			AC Coil 交流线圈		
	Coil Resistance $\Omega$ ( $\pm 10\%$ ) 线圈阻值	Max Operate Voltage 最大吸合电压 (VDC)	Min Release Voltage 最小释放电压 (VDC)	Coil Resistance $\Omega$ ( $\pm 10\%$ ) 线圈阻值	Max Operate Voltage 最大吸合电压 (VDC)	Min Release Voltage 最小释放电压 (VDC)
5	32	3.75	0.5	-	-	-
6	40	4.5	0.6	10.5	4.8	1.8
12	160	9	1.2	43	9.6	3.6
24	650	18	2.4	160	19.2	7.2
48	2600	36	4.8	668	38.4	14.4
120	-	-	-	3900	96	36
240	-	-	-	12000	176	72

**Outline Dimension 外形尺寸(mm)**


Plug-In Terminal 插拔式

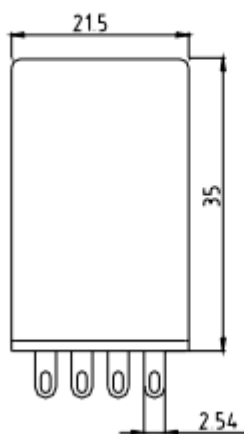

PCB Terminal 印刷线路板式

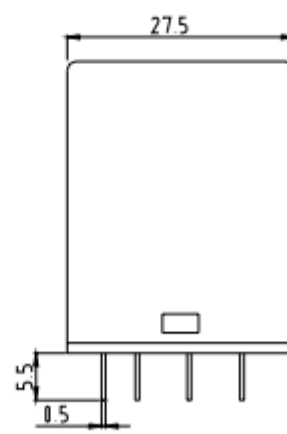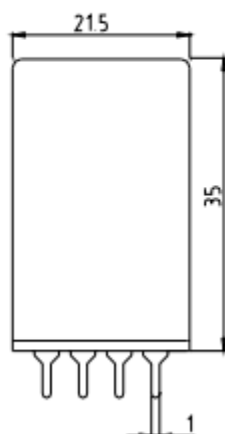


PC Board layout 安装图

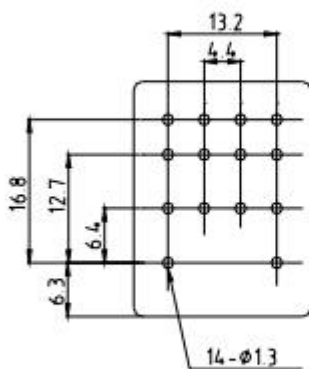

(Bottom View)底视

Wiring Diagram 接线图



(Bottom View)底视