


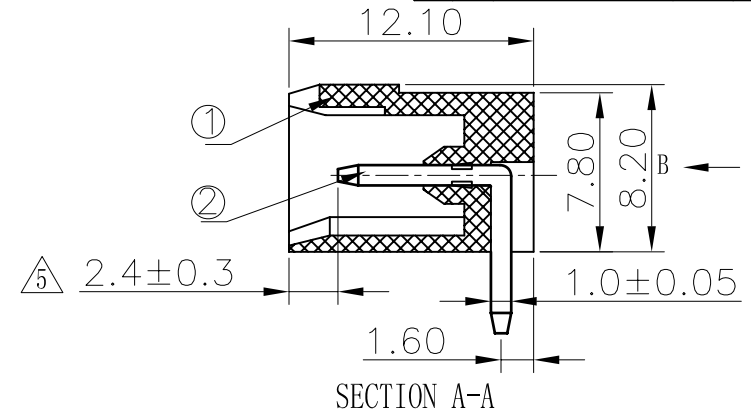


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
1		Drawing emend	CSX	04/21/06*
2		增加VDE、CE刻字	Ye j	02/27/08*
3		图面更新	Ye j	03/28/08*
4		增加自动化方针	WLM	09/23/08*
5	10-0329	增加标注尺寸	COCO	10/04/10*

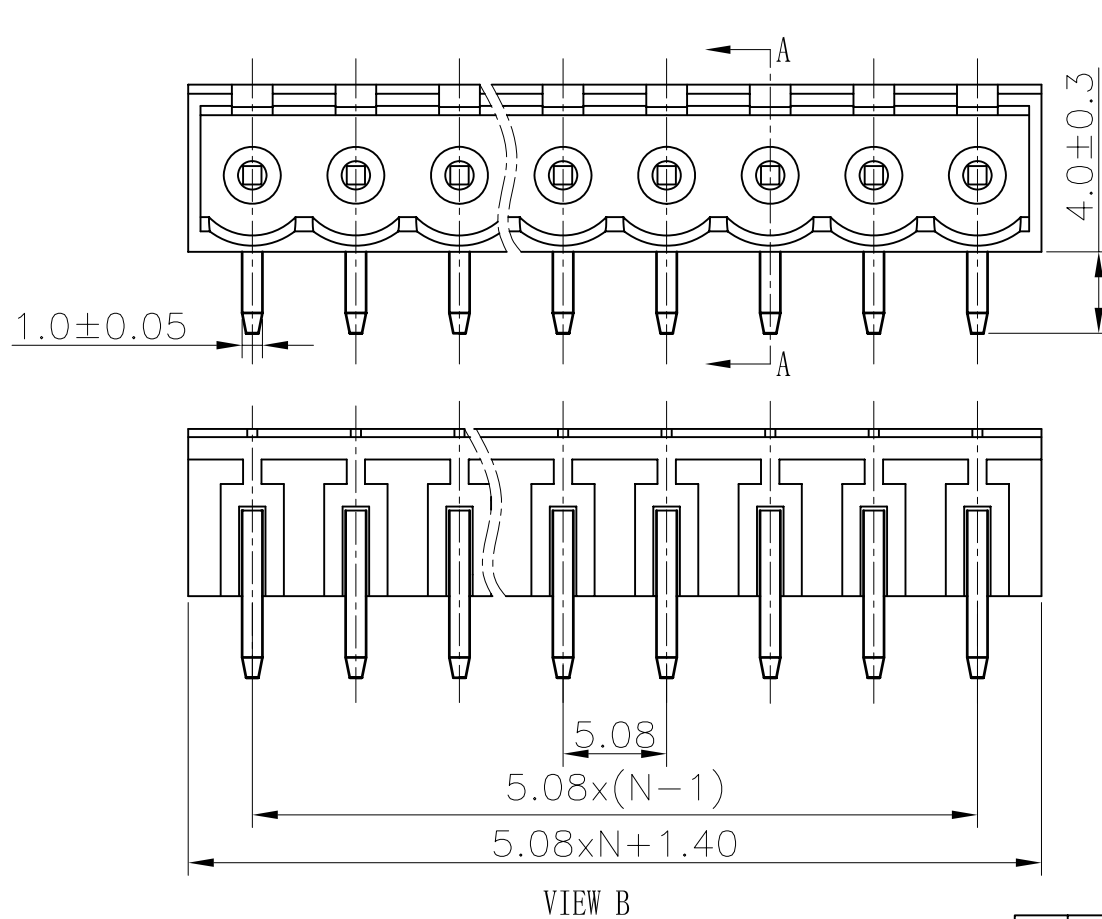

Notes:

- Pitch: 5.08mm, poles:2-24p
- Rated voltage/current:UL 300V/15A
VDE 320V/20A
- Operation temperatures:-40° C~+105° C
- Withstanding voltage: AC2000V/1min
- Insulation resistance:5000MΩ/DC1000V
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 30 to 60	over 60 to 100	over 100 to 150	over 150		
to 6	±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0
to 10								±0.05/10

2	2EDGR-Pin header	41008B00120 (H)	XX	Brass	Automatic assembly	
2	2EDGR (A) Pin header	1008B00040 (H)	XX	Brass	Manual assembly	
1	2EDGRC-5.08-Housing	1009A0YXXA (H)	1	PA66	UL94V-0	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES	
DETAILED LISTS			 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD			
	TOLERANCES EXCEPT AS NOTED					
	DFTO HW					DATE 08/23/05*
	CHKD					DATE
	MFO					DATE
	MM		NAME 2EDGRC-5.08-XXP-1Y-00A(H)			
	.0 ±	±				
	.00 ±	±				
	.000 ±	±				
	ANGLES ± 1°		DRAWING NO. 2EDGRC-5.08-E06 /PART NO.	SIZE A3	REV T5 10/04/10*	
G.E :						
THIRD ANGLE PROJECTION						
FINISH :		DO NOT SCALE DRAWING				
SCALE : 1:1		SHEET 1 OF 1				