

## 型号说明 Ordering Information

PBS-10B-2

改进2型 Improved type 2  
 电路特性 Circuitry trait  
 产品序号 Product order  
 按钮开关 Push-button switch

## 技术特性 Specification

- 1.规格 Rating:3A 125VAC;1A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1000VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:50,000 Cycles


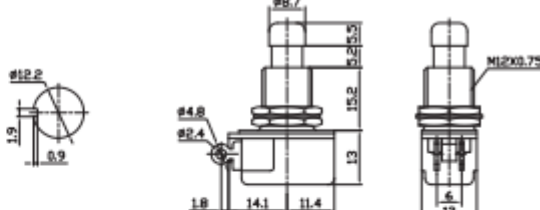

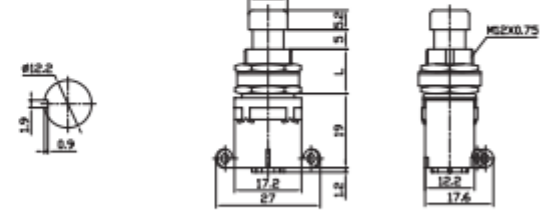

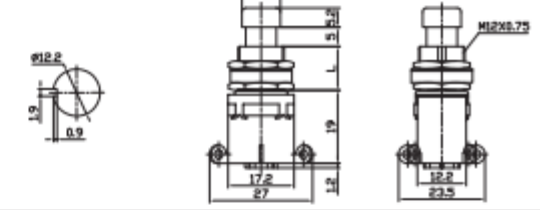

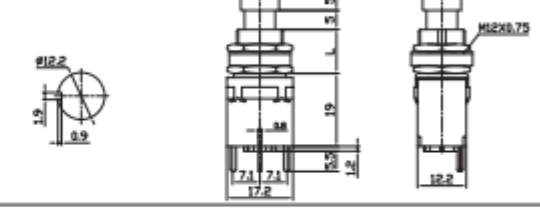

### 电路特性 Circuitry trait

A	ON - OFF	Push on/Push off	With lock
B	(ON) - OFF	Push on	Momentary(Open type)
C	ON - (OFF)	Push off	Momentary(Close type)

( ):回弹指示 Indicates Momentary

### 按钮颜色 Push-button color

红 Red      白 White  
 绿 Green    黑 Black  
 桔黄 Orange    黄 Yellow  
 蓝 Blue

	<p><b>PBS-24B-4</b> OFF-(ON)                  2A 250VAC;4A 125VAC</p>	
	<p><b>PBS-24-102</b> ON-ON  <b>PBS-24-112</b> ON-(ON)                  2A 250VAC;4A 125VAC                  SPDT 3P                  (L=14.2, 11.8, 9.8)</p>	
	<p><b>PBS-24-202</b> ON-ON  <b>PBS-24-212</b> ON-(ON)                  2A 250VAC;4A 125VAC                  DPDT 6P                  (L=14.2, 11.8, 9.8)</p>	
	<p><b>PBS-24-102P</b> ON-ON  <b>PBS-24-112P</b> ON-(ON)                  2A 250VAC;4A 125VAC                  SPDT 3P                  (PC terminal)                  (L=14.2, 11.8, 9.8)</p>	
	<p><b>PBS-24-202P</b> ON-ON  <b>PBS-24-212P</b> ON-(ON)                  2A 250VAC;4A 125VAC                  DPDT 6P                  (PC terminal)                  (L=14.2, 11.8, 9.8)</p>	