

$I_{F(AV)} = 30\text{Amp}$
 $V_R = 150\text{V}$

Major Ratings and Characteristics


Characteristics	Value	Units
$I_{F(AV)}$ Rectangular waveform	30	A
V_{RRM}	150	V
I_{FSM} @ $t_p = 5\mu\text{s}$ sine	1000	A
V_F @ 15Apk , $T_J = 125^\circ\text{C}$ (per leg)	0.78	V
T_J	-55 to 175	°C

Description/ Features

The 30CPQ150 center tap Schottky rectifier series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 175°C T_J operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

Case Styles

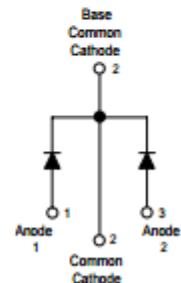

TO-247AC

Voltage Ratings

Part number	30CPQ150	
V_R Max. DC Reverse Voltage (V)		150
V_{RRM} Max. Working Peak Reverse Voltage (V)		

Absolute Maximum Ratings

Parameters	30CPQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	30 Per Device 15 Per Leg	A	50% duty cycle @ $T_c = 135^\circ\text{C}$, rectangular wave form
I_{FSM} Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	1000 340	A	5μs Sine or 3μs Rect. pulse 10ms Sine or 6ms Rect. pulse Following any rated load condition and with rated V_{RRM} applied
E_{AS} Non-Repetitive Avalanche Energy (Per Leg)	11.25	mJ	$T_J = 25^\circ\text{C}$, $I_{AS} = 0.50\text{Amps}$, $L = 90\text{mH}$
I_{AR} Repetitive Avalanche Current (Per Leg)	0.50	A	Current decaying linearly to zero in 1 μsec Frequency limited by T_J max. $V_A = 1.5 \times V_R$ typical




Electrical Specifications

Parameters		30CPQ	Units	Conditions	
V_{FM} (Per Leg) * See Fig. 1	Max. Forward Voltage Drop	1.00	V	@ 15A	$T_J = 25^\circ C$
		1.19	V	@ 30A	
		0.78	V	@ 15A	$T_J = 125^\circ C$
		0.93	V	@ 30A	
I_{RM} (Per Leg) * See Fig. 2	Max. Reverse Leakage Current	0.1	mA	$T_J = 25^\circ C$	$V_R = \text{rated } V_R$
		15	mA	$T_J = 125^\circ C$	
C_T	Max. Junction Capacitance (Per Leg)	340	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz)	25°C
L_S	Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body	
dv/dt (Rated V_R)	Max. Voltage Rate of Change	10000	V/μs		

(1) Pulse Width < 300μs, Duty Cycle <2%

Thermal-Mechanical Specifications

Parameters		30CPQ	Units	Conditions		
T_J	Max. Junction Temperature Range	-55 to 175	°C			
T_{stg}	Max. Storage Temperature Range	-55 to 175	°C			
R_{thJC}	Max. Thermal Resistance Junction to Case (Per Leg)	2.20	°C/W	DC operation	* See Fig. 4	
R_{thJC}	Max. Thermal Resistance Junction to Case (Per Package)	1.10	°C/W	DC operation		
R_{thCS}	Typical Thermal Resistance, Case to Heatsink	0.24	°C/W	Mounting surface , smooth and greased		
wt	Approximate Weight	6 (0.21)	g(oz.)			
T	Mounting Torque	Min.	6 (5)	Kg-cm	* See Fig. 4	
		Max.	12 (10)	(lbf-in)		
Case Style		TO-247AC(TO-3P)		JEDEC		
Marking Device		30CPQ150				

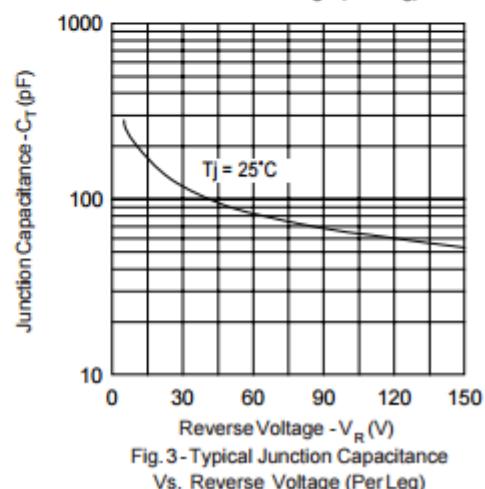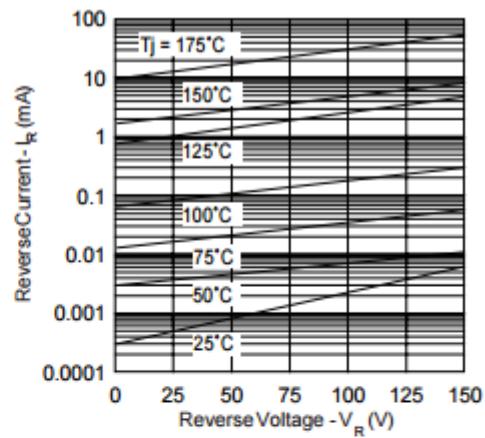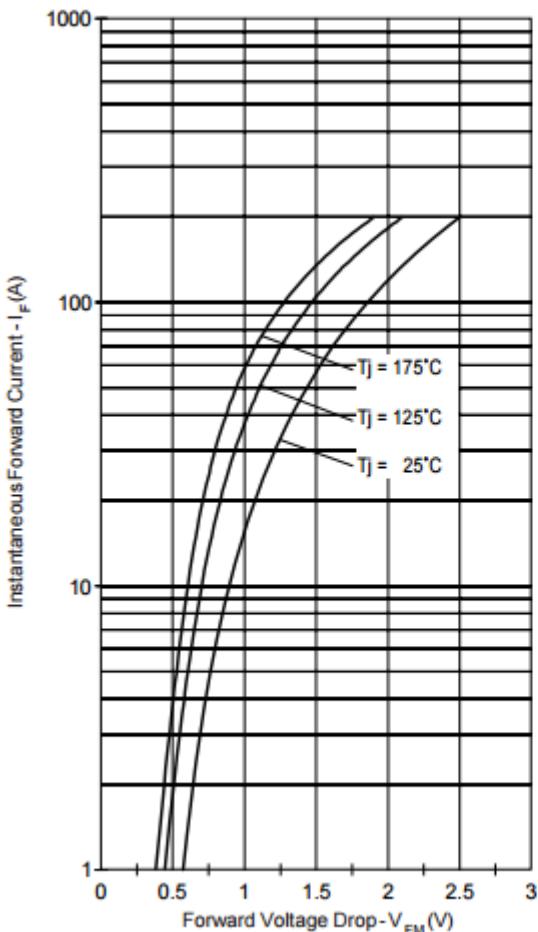

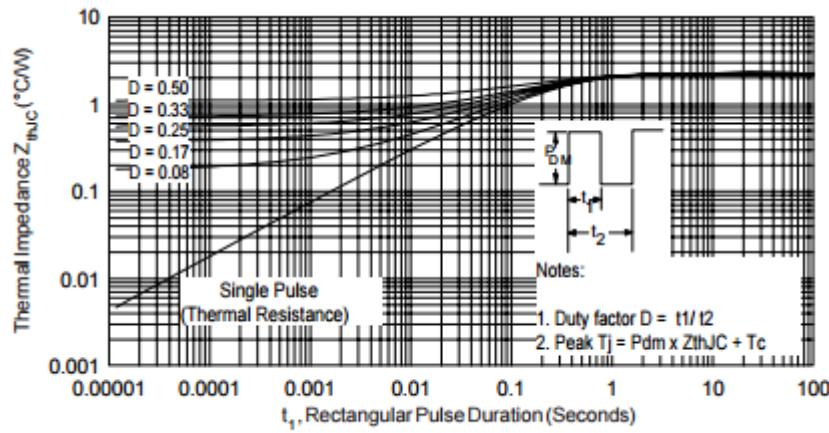


Fig. 4 - Max. Thermal Impedance Z_{thJC} Characteristics (Per Leg)

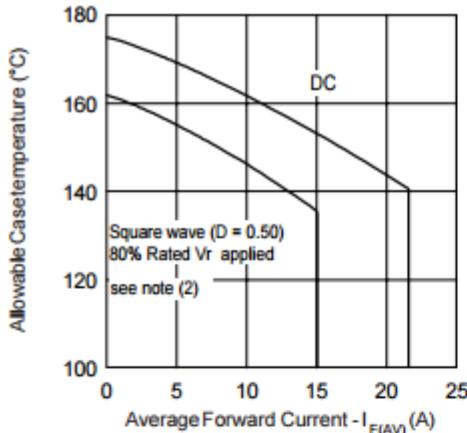


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

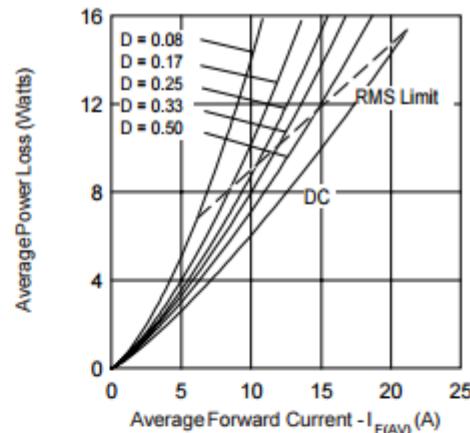


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

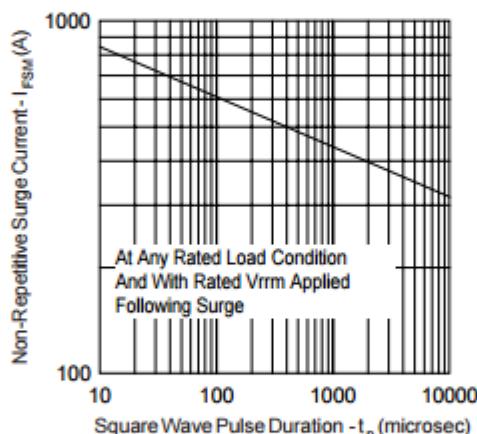


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)


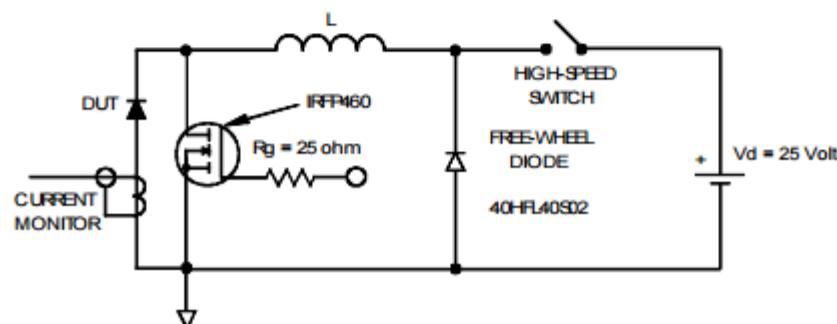


Fig. 8 - Unclamped Inductive Test Circuit

Marking Information

EXAMPLE: THIS IS A 30CPQ150
WITH ASSEMBLY
LOT CODE 5657
ASSEMBLED ON WW 36, 2001
IN ASSEMBLY LINE "H"

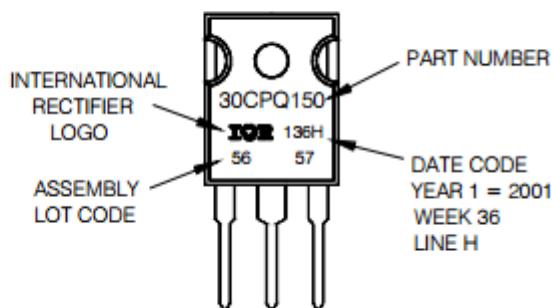

Ordering Information Table

Device Code

30	C	P	Q	150	-
1	2	3	4	5	6

- 1** - Current Rating (30 = 30A)
- 2** - Circuit Configuration
C = Common Cathode
- 3** - Package
P = TO-247
- 4** - Schottky "Q" Series
- 5** - Voltage Code (150 = 150V)
- 6** - • none = Standard Production
• PbF = Lead-Free

Tube Standard Pack Quantity : 25 pieces