


# HK 14FH

# MINIATURE HIGH POWER RELAY

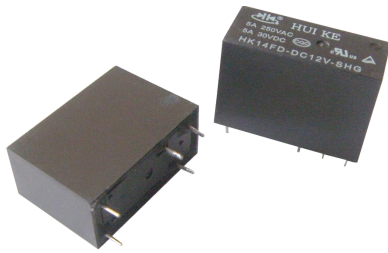

## Features

- 16A switching capability
- 5kV dielectric strength  
(between coil and contacts)
- Plastic sealed and dust protected types available
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (29.0 x 12.7 x 20.8) mm

## CONTACT DATA

Contact Form	1A 1B 1C
Contact Material	Silver Alloy
Contact Ratings	16A 250VAC /16A 30VDC
Max Switching Voltage	250VAC/30VDC
Max Switching Current	16A
Max Switching Power	4000VA /480W
Contact Resistance	100MΩ(at 1A 6VDC)
Electrical Life	1X10 <sup>5</sup> Ops(30Ops/min)
Mechanical Life	1X10 <sup>7</sup> Ops(300Ops/min)

## GENERAL DATA

Insulation Resistance	100MΩ 500VDC	
Dielectric Strength	Between coil & contacts	5000VAC 1min
	Between open contacts	1000VAC 1min
Operate Time	Max. 15ms	
Release Time	Max. 5ms	
Temperature Range	- 40°C to +70°C	
Shock Resistance	Functional	98m/s <sup>2</sup> (10g)
	Destructive	980m/s <sup>2</sup> (100g)
Vibration Resistance	10 to 55Hz 1.5mm	
Humidity	40% to 85% RH	
Weight	Approx. 14g	
Safety Standard	CUL TÜV	

## COIL DATA

Nominal Voltage (VDC)	Coil Resistance at 20°C ± 10%(Ω)		Max Operate Voltage (VDC)	Min Release Voltage (VDC)	Max Applicate Voltage (VDC)
	0.53W	0.72W			
3	17	12.5	2.25	0.30	4.20
5	47	36	3.75	0.50	7.00
6	68	50	4.50	0.60	8.40
9	160	115	6.75	0.90	12.60
12	275	200	9.00	1.20	16.80
24	1100	800	18.00	2.40	33.60
48	4170	3200	36.00	4.80	67.20


## ORDERING INFORMATION

HK14FW	-	DC	6V	-	S	D	1A	X	X		
										Special request code	G: RoHS
										Mounting termination	NIL:PCB
										Contact Form	1C 1A 1B NIL:1C
										Coil Power	NIL:0.72W D:0.53W
										Type of Sealing	NIL: Flow Solder Type S: Plastic Sealed Type
										Coil Voltage	5V 6V 9V 12V 24V 48V
										Coil Type	DC
										Type	HK14FW

- Notes:1) We recommend dust protected types for a clean environment (free from contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc.).  
We suggest to choose plastic sealed types and validate it in real application for an unclean environment (with contaminations like H<sub>2</sub>S, SO<sub>2</sub>, NO<sub>2</sub>, dust, etc).  
If water cleaning is required after the relay is assembled on PCB, please contact us for suggestion about suitable parts.
- 2) The standard type is made of black cover. If smoke cover is required, please add a special suffix (611) when ordering. Please take note that smoke cover is only available for dust protected type.



# OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

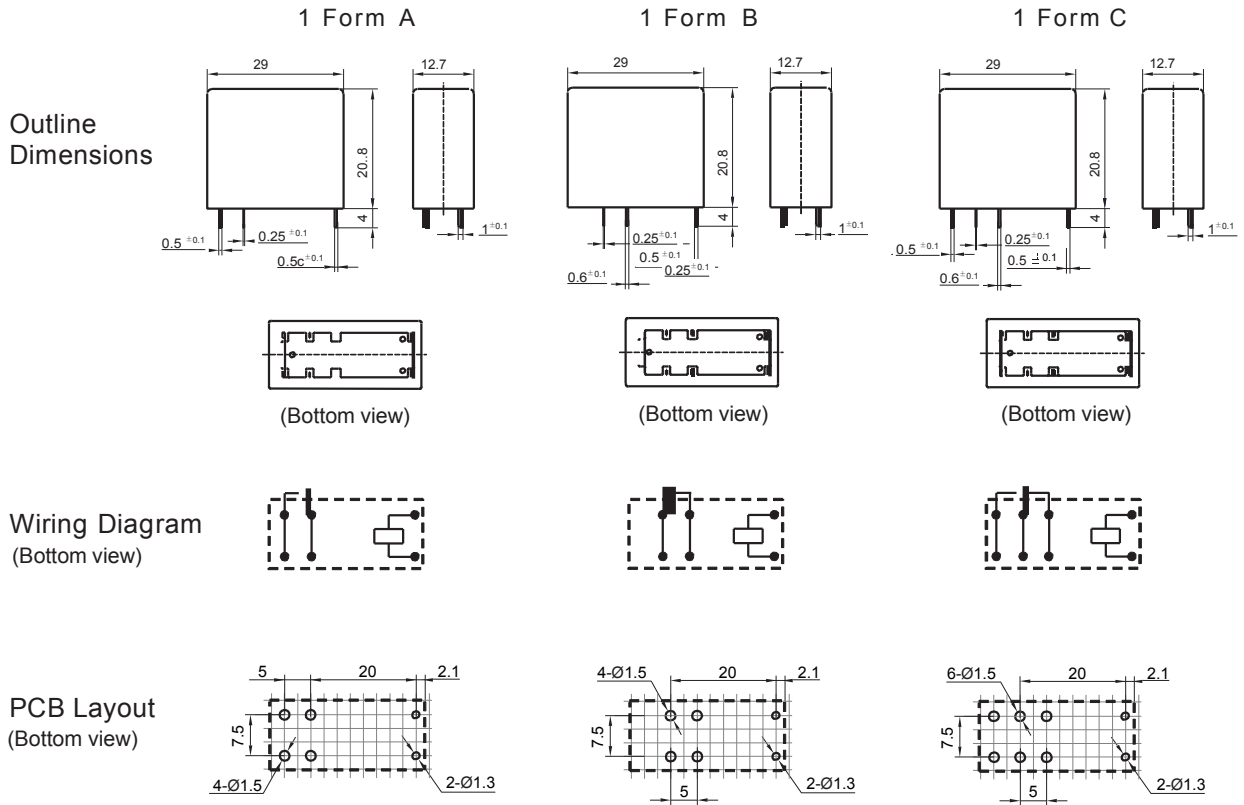

- Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1\text{mm}$ , tolerance should be  $\pm 0.2\text{mm}$ ; outline dimension  $> 1\text{mm}$  and  $\leq 5\text{mm}$ , tolerance should be  $\pm 0.3\text{mm}$ ; outline dimension  $> 5\text{mm}$ , tolerance should be  $\pm 0.4\text{mm}$ .
- 2) The tolerance without indicating for PCB layout is always  $\pm 0.1\text{mm}$ .
- 3) The width of the gridding is 2.5mm.

## CHARACTERISTIC CURVES

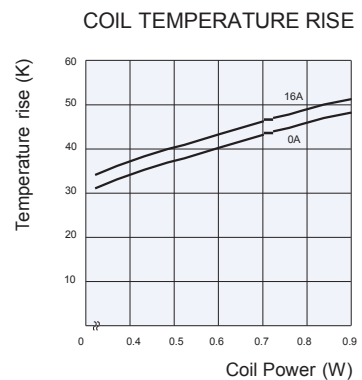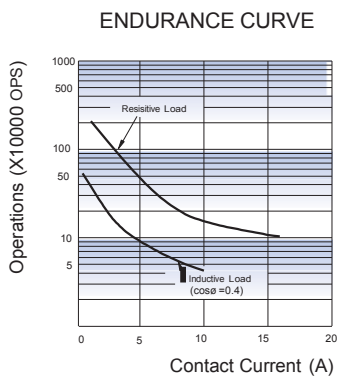

### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a tight position choose the suitable product for their own application. If there is any query, please contact Ever-way for the technical service. However, it is the user's responsibility to determine which product should be used only.