



;(Assembly Procedure)

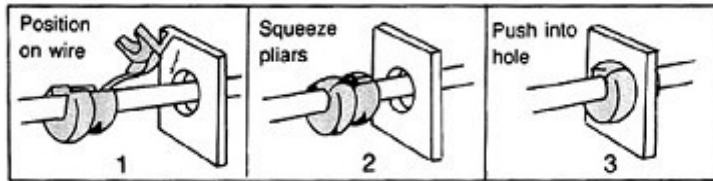

material: UL NYLON66 Black  
fireproofing class:94V-2

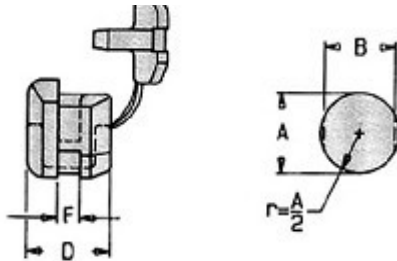

mm

|          | Item No. | Cross Section Shape |            | Approx. Wire Size | Mounting Holes |      | Max. Thickness F mm | Length D mm | Packing |
|----------|----------|---------------------|------------|-------------------|----------------|------|---------------------|-------------|---------|
|          |          |                     |            |                   | A mm           | B mm |                     |             |         |
| SR Calmp | 2P-4     | Flat                |            | 3 X 5.6           | 9.5            | 8.7  | 1.6                 | 10.3        | 1000PCS |
|          | 3P-4     |                     | 3 X 5.6    | 11                | 9.9            | 1.6  | 10.3                |             |         |
|          | 3W-1     |                     | 3 X 5.6    | 11                | 9.9            | 2.5  | 10.3                |             |         |
|          | 4N-4     |                     | 3.71       | 12.7-13.1         | 11.8           | 1.6  | 10.3                |             |         |
|          |          |                     | 3.8X7.6    |                   |                |      |                     |             |         |
|          | 4K-4     |                     | 3.71       | 12.7-13.1         | 11.8           | 2.5  | 10.3                |             |         |
|          |          |                     | 3.8X7.6    |                   |                |      |                     |             |         |
|          | 5N-4     | Round               | 6.4Φ-7.6 Φ | 12.7-13.1         | 11.5           | 1.6  | 11                  | 500PCS      |         |
|          | 5P-4     |                     | 6.4Φ-7.6 Φ | 12.7-13.1         | 11.5           | 2.5  | 11                  |             |         |
|          | 6N-4     |                     | 7.6 Φ      | 15.9              | 14             | 1.6  | 14.8                |             |         |
|          | 6P-4     |                     | 7.6 Φ      | 15.9              | 14             | 3.2  | 14.8                |             |         |
|          | 6N3-4    |                     | 8.2Φ-9.2 Φ | 15.9              | 14             | 1.6  | 14.8                |             |         |
|          | 6P3-4    |                     | 8.2Φ-9.2 Φ | 15.9              | 14             | 3.2  | 14.8                |             |         |
|          | 7N-2     |                     | 9.2Φ-10.5Φ | 19                | 16.8           | 1.6  | 19                  | 100PCS      |         |
|          |          |                     | 11 Φ       | 19.8              |                |      |                     |             |         |
|          | 7P-2     |                     | 9.2Φ-10.5Φ | 19                | 16.8           | 3.2  | 19                  |             |         |
|          |          |                     | 11 Φ       | 19.8              |                |      |                     |             |         |
|          | 8P-2     |                     | 12Φ-15.2 Φ | 22.2              | 21.3           | 3.2  | 20.8                |             |         |
|          | 9R-1     |                     | 11Φ-15.0 Φ | 19.0              | 19.0           | 1.6  | 17.5                |             |         |

