



15EDGK-3.5
15EDGK-3.81

Electrical

Standard	UL	IEC
Rated voltage	300V	250V
Rated current	8A	7A
Wire range	28-16AWG	0.5-1.5mm ²
Withstanding voltage	AC2000V/1Min	

Mechanical




Torque	0.2Nm(1.7Lb-In)
Ambient temperature	-40℃~+105℃
Strip length	7mm

Dimensions

Pitch	3.5mm(.138") 3.81mm(.150")
Poles	2P-24P

Material

Housing	PA66,UL94V-0
Screws	M2,Steel,Cr ³⁺ Zn-plated
Contact	Phosphor bronze
Cage	Brass,Ni-plated

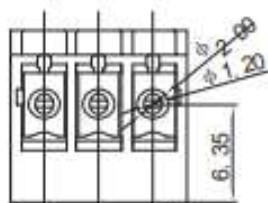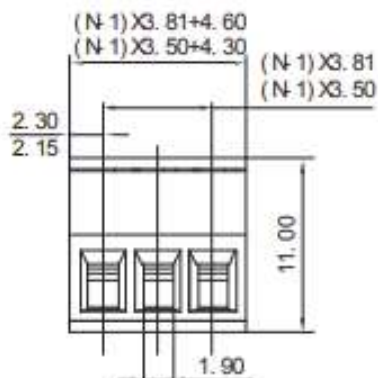

A 向视图