


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		图面更新	HW	04/14/06
△		增加CQC刻字	WLM	02/02/09
△		修改视图	LJH	05/30/09
△		图面更新	LJH	06/11/09
△	10-0359	增加VDE刻字及修改参数	ZXX	10/21/10

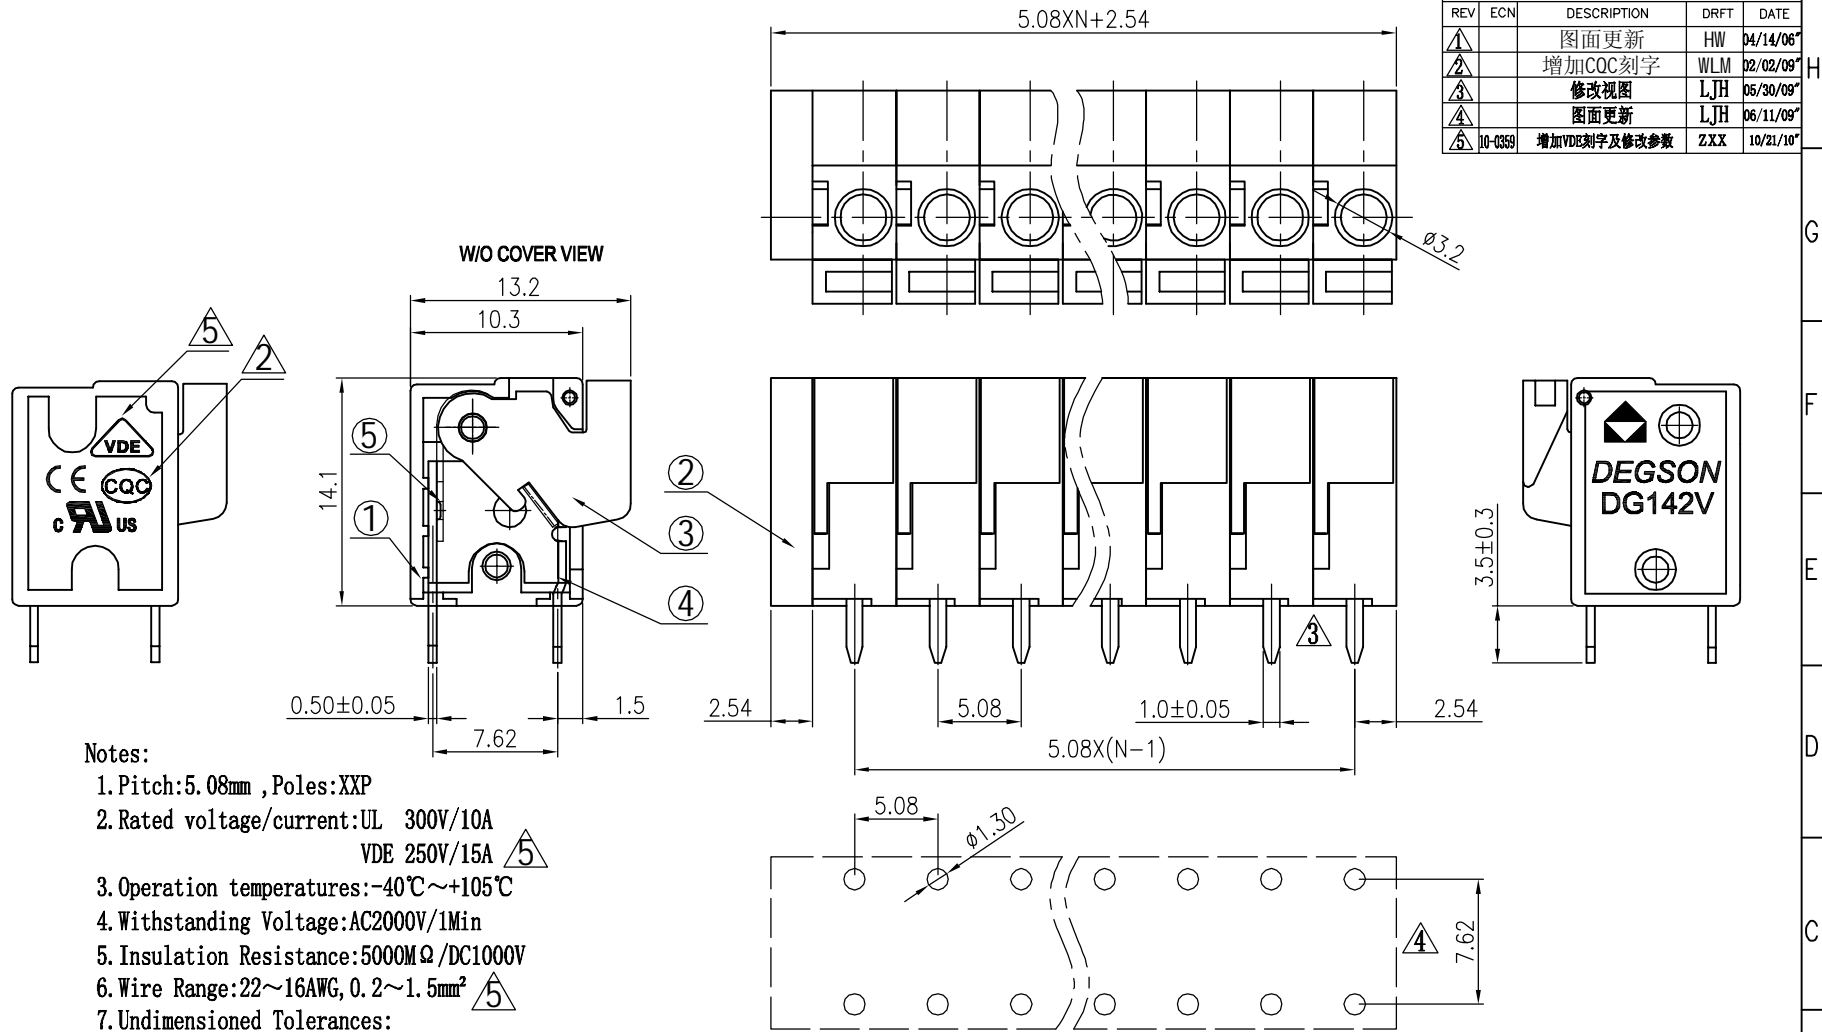

Notes:

- Pitch: 5.08mm , Poles: XXP
- Rated voltage/current: UL 300V/10A
VDE 250V/15A
- Operation temperatures: -40°C ~ +105°C
- Withstanding Voltage: AC2000V/1min
- Insulation Resistance: 5000MΩ / DC1000V
- Wire Range: 22~16AWG, 0.2~1.5mm²
- Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6	over 10	over 30	over 60	over 100	over 150	∩	
to	to 10	to 24	to 30	to 60	to 100	to 150	∇	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	

5	DG142 Spring	X000000130 (H)	XX	Stainless Steel	
4	DG142V Pin header	3003B00010 (H)	XX	Brass	SnCe Plate
3	DG142V-5.08 Button	3003D0501A (H)	XX	PA66	UL94V-0
2	DG142V-5.08 Cover	3003C0Y01A (H)	1	PA66	UL94V-0

TOP VIEW-LAYOUT

1	DG142V-5.08 Housing	3003A0Y01A (H)	XX	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
TOLERANCES EXCEPT AS NOTED		DFTO Home DATE 12/20/05			
MM (INCH)		CHKD DATE	DATE		
TOLERANCES EXCEPT AS NOTED		MFO DATE	DATE		
MM		APPVL DATE	DATE		
.0 ±		MATERIAL :			
.00 ±		G.E. :			
.000 ±		FINISH :			
ANGLES ± 1°		SCALE : 1:1			
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING			
NAME		DRAWING NO. DG142V-5.08-E13			
DEGSON®		SIZE A3			
DEGSON ELECTRONICS CO., LTD		REV T5 10/21/10			
NAME		SHEET 1 OF 1			
DG142V-5.08-XXP-1Y-00A(H)		/PART NO.			