



H-XX pitch 2.54mm + terminal series

■ 壳体 HOUSING




◆ 材料 Material: Nylon 66 UL 94V-0

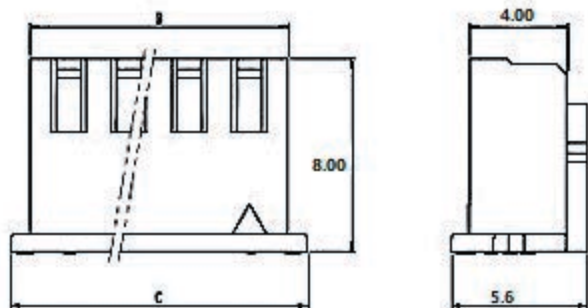

范围	>0~3	>3~18	>18~50	>50~120
公差	±0.12	±0.15	±0.3	±0.5

Poles	Part No.	Dimensions mm		
		A	B	C
2	A2501-H02	2.54	5.7	7.3
3	A2501-H03	5.00	8.2	9.8
4	A2501-H04	7.50	10.7	12.3
5	A2501-H05	10.00	13.2	14.8
6	A2501-H06	12.50	15.7	17.3
7	A2501-H07	15.00	18.2	19.8
8	A2501-H08	17.50	20.7	22.3
9	A2501-H09	20.00	23.2	24.8
10	A2501-H10	22.50	25.7	27.3
11	A2501-H11	25.00	28.2	29.8
12	A2501-H12	27.50	30.7	32.3
13	A2501-H13	30.00	33.2	34.8
14	A2501-H14	32.50	35.7	37.3
15	A2501-H15	35.00	38.2	39.8
16	A2501-H16	37.50	40.7	42.3
--	--	--	--	--
20	A2501-H20	47.50	50.7	52.3

■ 端子 TERMINAL

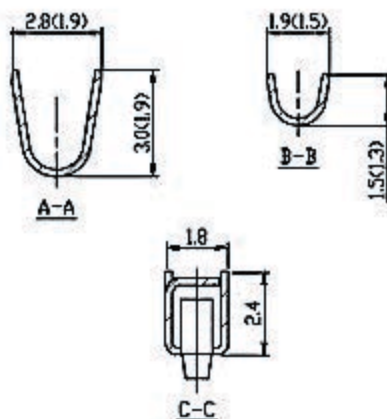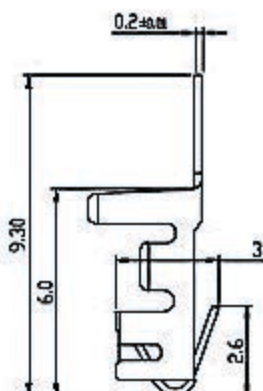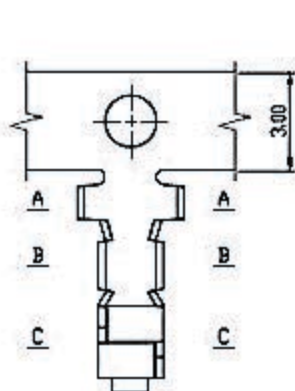

范围	>0~3	>3~18	>18~50	>50~120
公差	±0.12	±0.15	±0.3	±0.5

Part No.	Wire Range	Insulation O. D	Material	Finish	Qty/reel
A2501A-TP2	AWG #28 to #22	1.2 to 1.9mm	Phosphor bronze	Tin-plated	6,000pcs
A2501B-TP2	AWG #30 to #26	0.9 to 1.3mm	Phosphor bronze	Tin-plated	8,000pcs

RUI CHI