


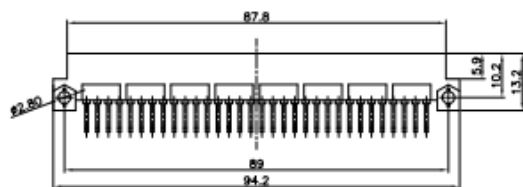
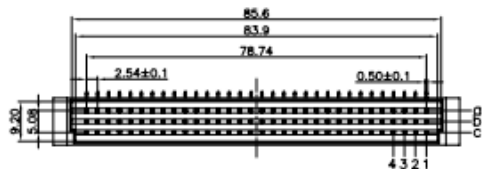



REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
				LJC 07/04/05

MALE

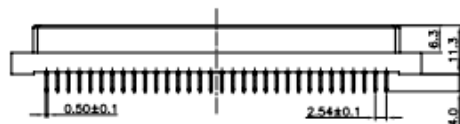

FEMALE

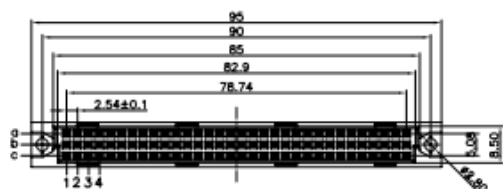

NOTES:

1. SPECIFICATIONS

- . Contact Resistance: 30mΩ max.
- . Insulator Resistance: 1000MΩ min.at DC 500V
- . Current Rating: 2Amps
- . Dielectric withstanding voltage: AC 500V For 1 minute
- . Operating Temperature: -20°C to +70°C
- . Contact: Copper alloy
- . Housing: PBT

2. Product Number code:

DS1120 - X X X X X

- Column with Contacts type
  - 1: 1-3 type
  - 2: 2-4 type
  - 3: 1-2-3 type
- Rows with Contacts type
  - 1: abc type(3 rows with contact)
  - 2: ac type(2 rows with contact)
- Mounting type
  - R: right angle type
  - V: V/T type
- Contact plating
  - 6: full Tin plating
  - 0: selective gold flash
- Connector type
  - M: male
- No.of contacts
  - 96 48

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	TITLE
X. ±0.60	X. ±5°	mm	DIN 41612 R TYPE(3ROWS)
.X ±0.38	.X ±3°	SHEET SIZE	A4
.XX ±0.25	.XX ±2°	SERIES	DS1120 SERIES
DRAWING TYPE	CUSTOMER	DIN41612 3°32 64 прям. вилка	DIN41612 3°16 48 угл. вилка
SCALE	1:1	DIN41612 3°32 64 розетка	DIN41612 3°32 32 розетка
DRAWING NO.	C-DS1120-XXXXXX	DIN41612 3°32 64 угл. вилка	DIN41612 3°32 32 угл. вилка
		DIN41612 3°32 96 розетка	DIN41612 3°32 48 розетка
		DIN41612 3°32 96 угл. вилка	DIN41612 3°32 48 угл. вилка
		DIN41612 3°32 96 розетка	