


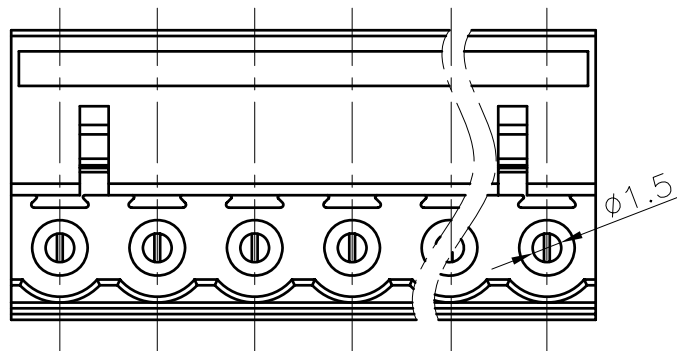


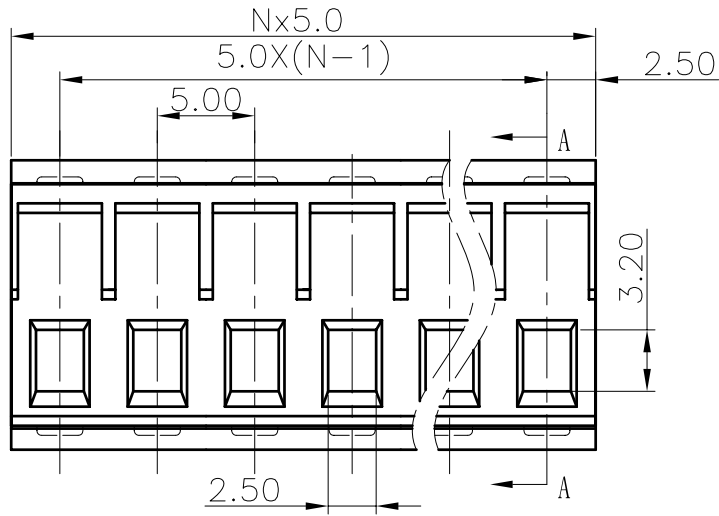

VIEW-B

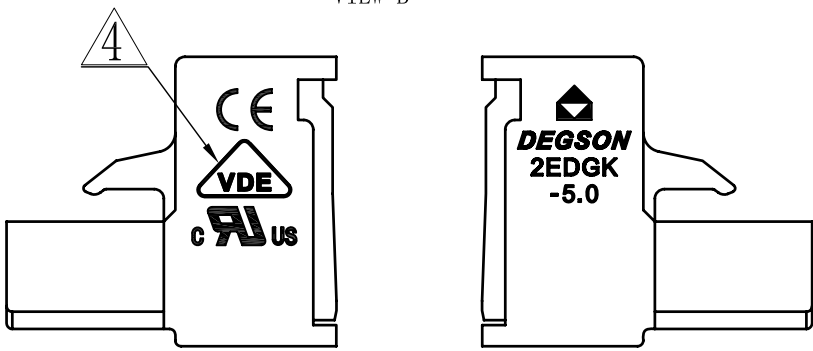

5	2EDG "—"Screws-M2.5	S000001370 (H)	XX	Steel	Cr ³⁺ Zn
4	DG128-Brass cage	X000000020 (H)	XX	Brass	Ni plated
3	2EDG-Clamp	1005B00010 (H)	XX	Phosor bronze	Ni plated
2	2EDGK-5.0-Cover	1016C0YXXA (H)	1	PA66	UL94V-0

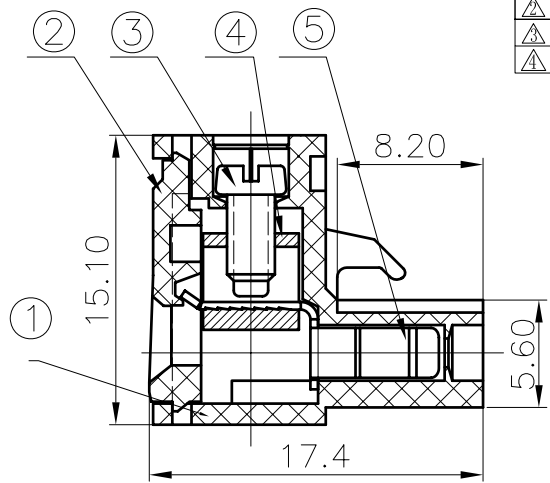

SECTION A-A

- Notes:
- 1. Pitch: 5.0mm Poles:2-24p
 - 2. Rated voltage/current:UL 300V/15A
VDE 320V/20A
 - 3. Insulation resistance: 5000MΩ/1000V
 - 4. Withstanding voltage: AC1500V/1min
 - 5. Wire range: 28-12AWG 2.5mm²
 - 6. Temp. Range: -40° C~+105° C
 - 7. Torque: 4.08kgf. cm
 - 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm				
	over 6	over 10		over 30	over 60	over 100	over 150
to 6	to 10	to 24	to 30	to 60	to 100	to 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0

1	2EDGK-5.0-Housing	1016A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
DEGSON 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD					
NAME 2EDGK-5.0-XXP-1Y-00A(H)					
DRAWING NO. 2EDGK-5.0-E10				SIZE A3	REV T4
/PART NO.				01/14/08	
DO NOT SCALE DRAWING				SHEET 1	OF 1