

5 x 20mm Fuse Holders

HTC Panel Mount Series

Description

- For 5 x 20mm fuses
- Tin-plated brass terminals
- Shock safety of PC2
- High temperature thermoplastic meets:
 - UL 94V0
 - Glow wire test: 960°C IEC 695-2-1
- Solderability in accordance with IEC 68-2-20



Agency Information

- cURus: Guide IZLT2/IZLT8, File E14853
- VDE: HTC-35M: File 40004459, HTC-40M: File 40004458, HTC-55M: File 40004463, HTC-70M: File 40004457

Ordering

- Specify packaging and product code


Specifications

Part Number	Cap Type	Voltage Rating Vac	Current Rating (AC)		Ambient Temperature (°C)	Temperature Rise (°C)	Maximum Temperature (°C)
			UR	VDE			
HTC-35M	Threaded Cap/Carrier	250	10A	6.3A	24	43	85
HTC-40M	Screwdriver Slot	250	10A	6.3A	24	43	85
HTC-55M	Bayonet Cap/Carrier	250	10A	6.3A	24	43	85
HTC-70M	Bayonet Cap/Carrier	250	10A	6.3A	24	43	85


Dimensions - in (mm)

Drawings Not to Scale


HTC-35M

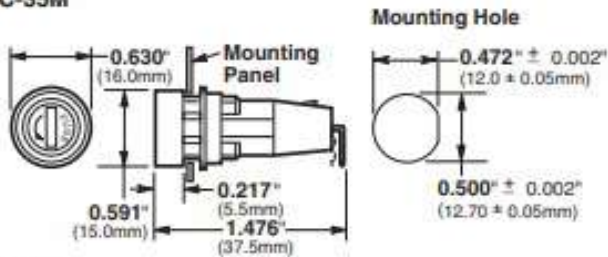


HTC-55M

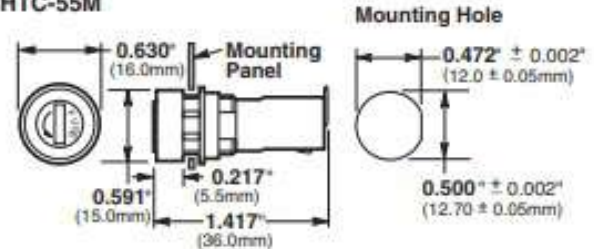

HTC-40M

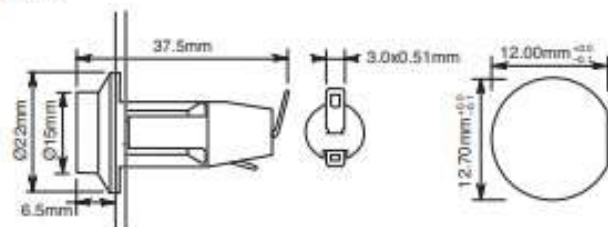

HTC-70M

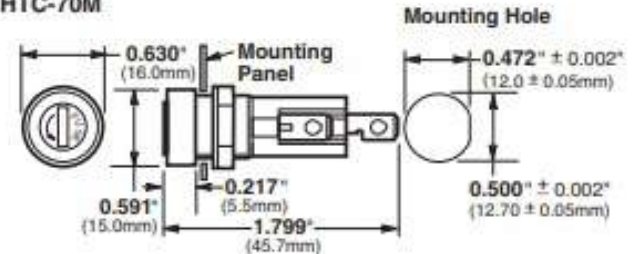

Component	Material
Terminal	Tin-Plated Brass
Body	Thermoplastic
Cap	Thermoplastic
Nut	Polycarbonate

Packaging Code	
Packaging Code	Description
Blank	10 fuse holders packed into a carton
BK	100 fuse holders packed into a cardboard shelf package