




WW130-F02 (10A)

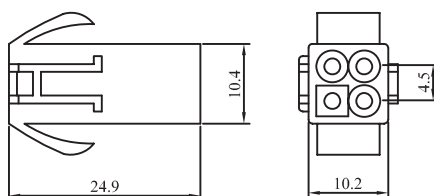


WW130-F04-1 (10A)

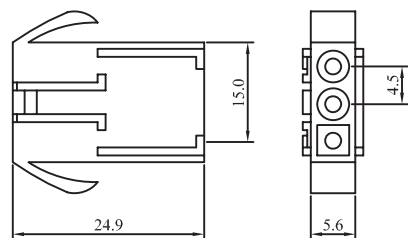


WW130-F03 (10A)

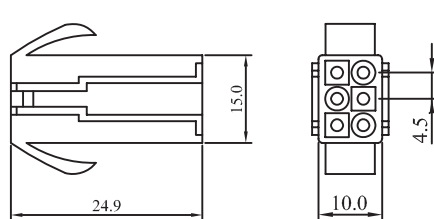


WW130-F06 (8A)

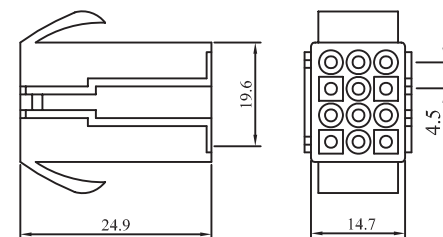


WW130-F12 (6A)

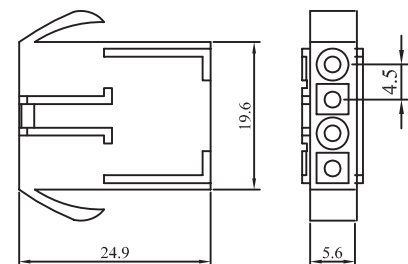

WW130-F04 (10A)

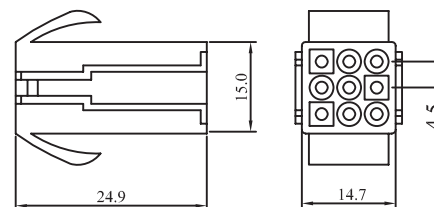


WW130-F09 (6A)

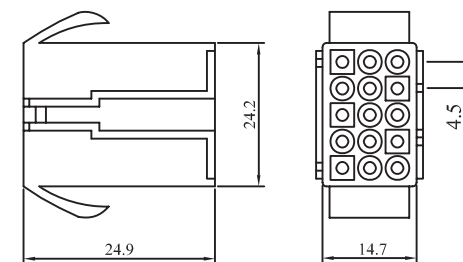

WW130-F15 (6A)

Material: Nylon 66 UL94V-0
 Applicable panel thickness: 0.8 to 2.0 mm
 Mate with: WW130-M Series housing
 Current rating:10A AC,DC Max
 Voltage Rating:300V AC,DC Max
 Contact resistance:10mΩ Max
 Insulation resistance:1000MΩ Min
 Withstanding voltage :1500V AC/Minute
 Temperature range:-25°C to +85°C

Rev	Descripton/Date	Drawn By: Storm.li	Customer:	Third angle projection 			Units: mm		
△		Checked By:Simmon	Part No.:	WW130-F Series			General Dimenson Tolerance		
△		Approved By: Tony	Title:	Housing			X.X ±0.25	X.XX ±0.1	X.XXX ±0.08
SGS Report No.: KA/2004/80788/A-2									