

VHF variable capacitance diode

BB131

FEATURES

- Excellent linearity
- Very small plastic SMD package
- C28: 1 pF; ratio: 14.

PINNING


PIN	DESCRIPTION
1	cathode
2	anode

APPLICATIONS

- Electronic tuning in satellite tuners
- Tunable coupling
- VCO.

DESCRIPTION

The BB131 is a variable capacitance diode, fabricated in planar technology, and encapsulated in the SOD323 (SC-76) very small plastic SMD package.

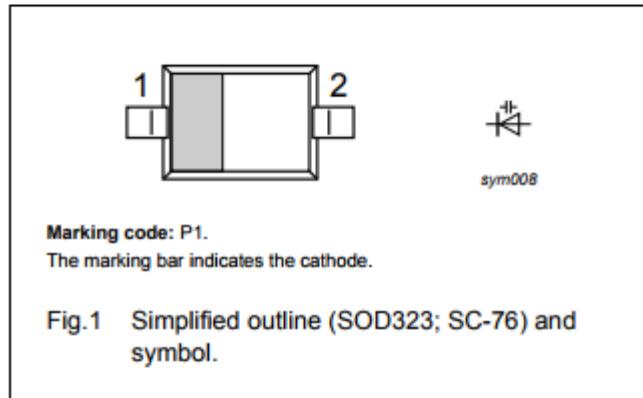

ORDERING INFORMATION

TYPE NUMBER	PACKAGE		
	NAME	DESCRIPTION	VERSION
BB131	-	plastic surface mounted package; 2 leads	SOD323

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 60134).

SYMBOL	PARAMETER	MIN.	MAX.	UNIT
V_R	continuous reverse voltage	-	30	V
I_F	continuous forward current	-	20	mA
T_{stg}	storage temperature	-55	+150	°C
T_j	operating junction temperature	-55	+125	°C

VHF variable capacitance diode

BB131

CHARACTERISTICS


$T_j = 25^\circ\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_R	reverse current	$V_R = 30 \text{ V}$; see Fig.3	-	10	nA
		$V_R = 30 \text{ V}$; $T_j = 85^\circ\text{C}$; see Fig.3	-	200	nA
r_s	diode series resistance	$f = 470 \text{ MHz}$; note 1	-	3	Ω
		$V_R = 0.5 \text{ V}$; $f = 1 \text{ MHz}$; see Figs 2 and 4	8	17	pF
C_d	diode capacitance	$V_R = 28 \text{ V}$; $f = 1 \text{ MHz}$; see Figs 2 and 4	0.7	1.055	pF
		$f = 1 \text{ MHz}$	12	16	
$C_{d(0.5V)}$ $C_{d(28V)}$	capacitance ratio				

Note

1. V_R is the value at which $C_d = 9 \text{ pF}$.

GRAPHICAL DATA

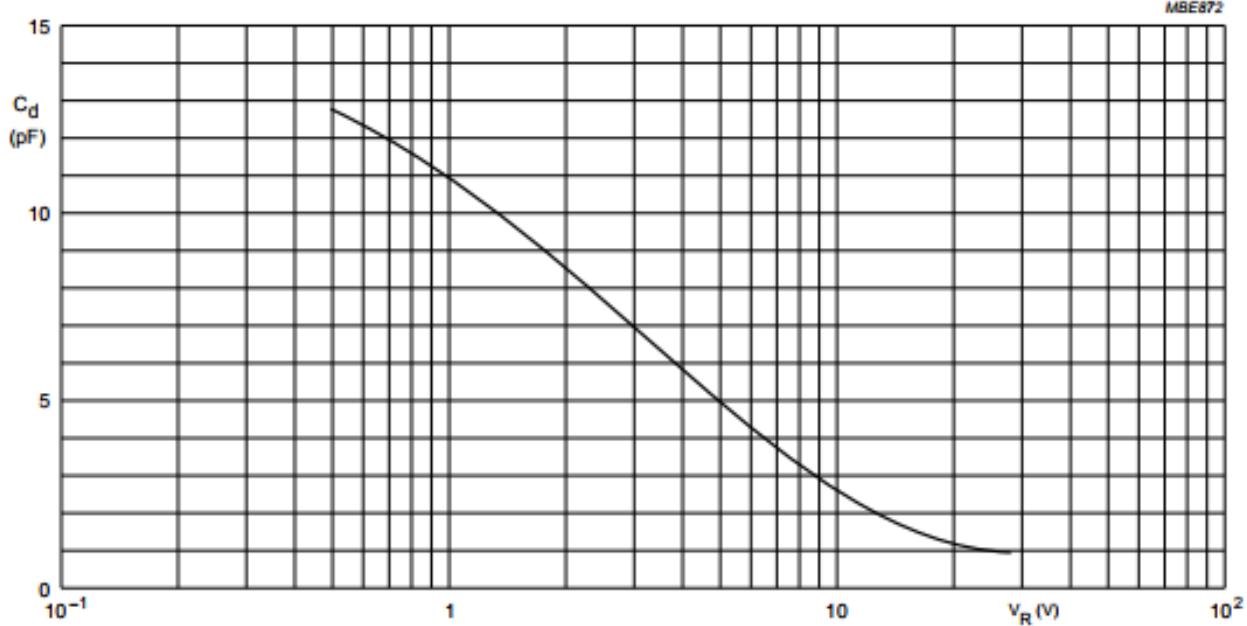

$T_j = 25^\circ\text{C}$; $f = 1\text{ MHz}$.

Fig.2 Diode capacitance as a function of reverse voltage; typical values.


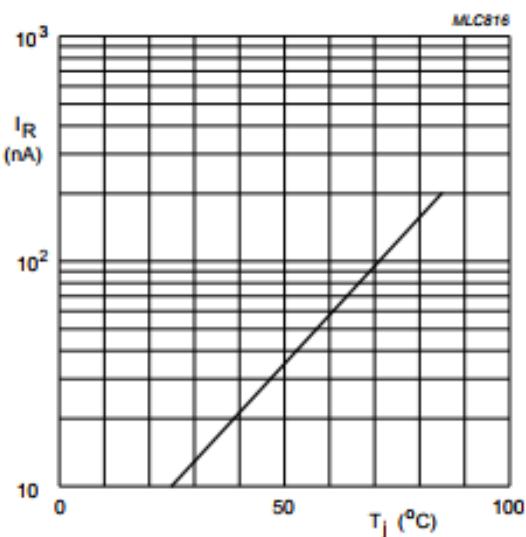


Fig.3 Reverse current as a function of junction temperature; maximum values.

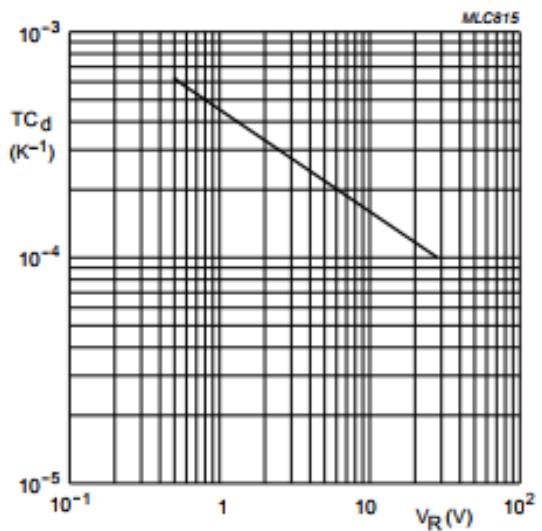




$T_j = 0$ to 85°C .

Fig.4 Temperature coefficient of diode capacitance as a function of reverse voltage; typical values.

PACKAGE OUTLINE

Plastic surface-mounted package; 2 leads

SOD323

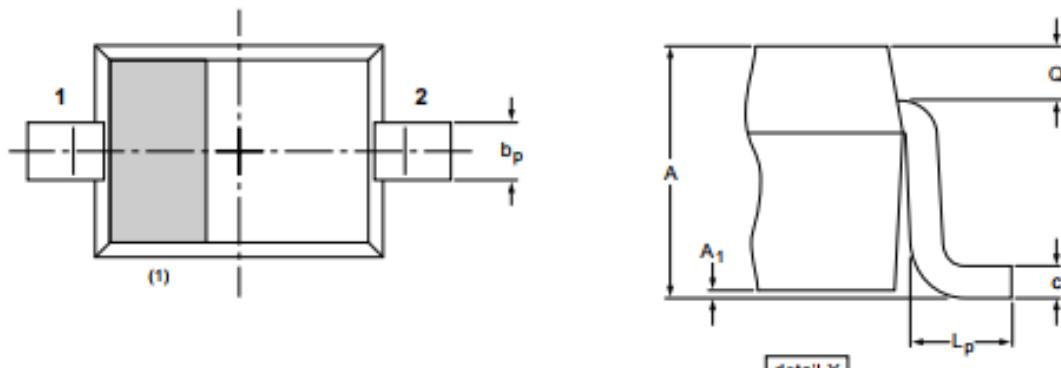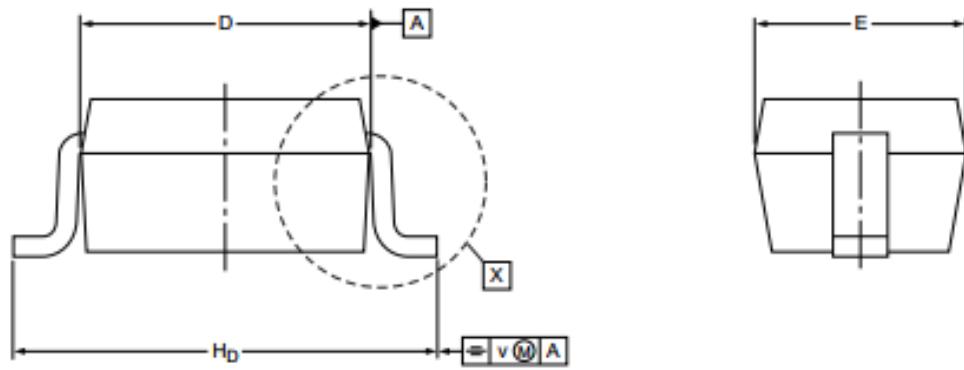

DIMENSIONS (mm are the original dimensions)

UNIT	A	A ₁ _{max}	b _p	c	D	E	H _D	L _p	Q	v
mm	1.1 0.8	0.05	0.40 0.25	0.25 0.10	1.8 1.6	1.35 1.15	2.7 2.3	0.45 0.15	0.25 0.15	0.2

Note

1. The marking bar indicates the cathode

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	JEITA	SC-76		
SOD323						-03-12-17- 06-03-16