


型号说明 Ordering Information

技术特性 Specification

PBS-10B-2

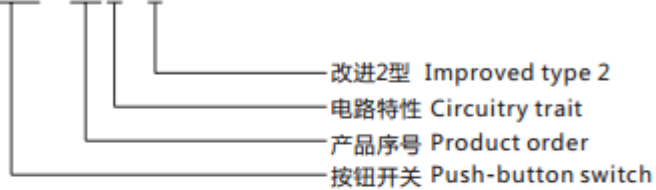

- 1.规格 Rating:3A 125VAC;1A 250VAC
- 2.接触电阻 Contact Resistance:20mΩ max
- 3.绝缘电阻 Insulation Resistance:500VDC 100MΩ min
- 4.耐电压 Dielectric Strength:1000VAC, 1Minute
- 5.操作温度 Operating Temperature:-25°C ~ +85°C
- 6.电气寿命 Electrical Life:50,000 Cycles

电路特性 Circuitry trait

按钮颜色 Push-button color

A	ON - OFF	Push on/Push off	With lock
B	(ON) - OFF	Push on	Momentary(Open type)
C	ON - (OFF)	Push off	Momentary(Close type)
():回弹指示 Indicates Momentary			

红 Red	白 White
绿 Greed	黑 Black
桔黄 Orange	黄 Yellow
蓝 Blue	

	<p>PBS-10B-2 OFF-(ON) PBS-10C-2 ON-(OFF) (Metal rod)</p>	
	<p>PBS-15A ON-OFF</p>	
	<p>PBS-15B OFF-(ON) PBS-15C ON-(OFF)</p>	
	<p>PBS-17A ON-OFF 4A 125VAC; 2A 250VAC</p>	
	<p>PBS-17A-2 ON-OFF (原PBS-17B)</p>	