



Front view



Back view

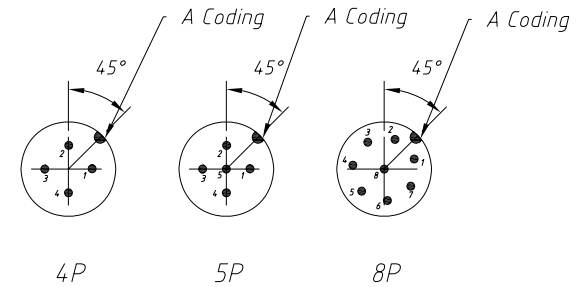

Electrical & Mechanical data

- IP rating: IP67*
- Contacts resistance: $\leq 5\text{ m}\Omega$*
- Insulation resistance: $\geq 100\text{ M}\Omega$*
- Orientation: Soldering, Rear lock*
- Over mold/ Shell: Metal shell*
- Connector contacts: Brass with gold plated*
- Coupling nut/screw: Brass with nickel plated screw*
- Insert/ Housing: PA66 + GF*
- Sealing: O-ring*
- Temperature Range: $-25^\circ\text{C} \sim +80^\circ\text{C}$*

Order information

L-KLS15-M12 A-B2 XX

- L: RoHS*
- M12: Screw type*
- A: A-Coding*
- B2: Soldering, Panel mount, Rear lock, Male*
- XX: Number of Contacts*

	4 Pin	5 Pin	8 Pin
Rated current	4A	4A	2A
Rated voltage	250V	60V	30V

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	Soldering connector, Panel mount, Rear lock, Automation technology, M12, Male
X.	± 0.60	X.	$\pm 5^\circ$		
.X	± 0.38	.X	$\pm 3^\circ$		
.XX	± 0.25	.XX	$\pm 2^\circ$		
Draw by:		PROJECTION		KLS P/N:	KLS15-M12A-B2XX
Check by:		UNITS	mm	<i>KLS ELECTRONIC CO., LTD.</i>	
		SHEET SIZE	A4		