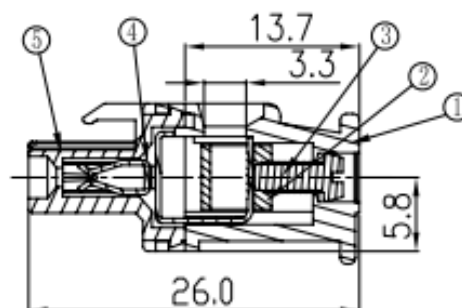

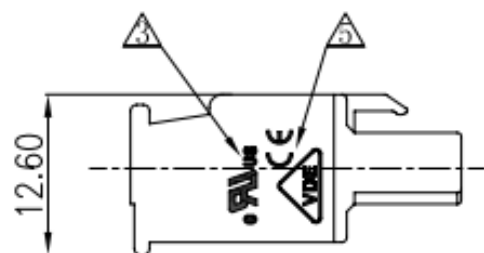
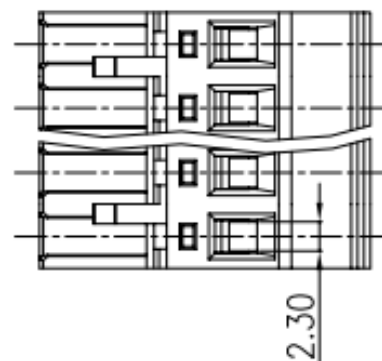
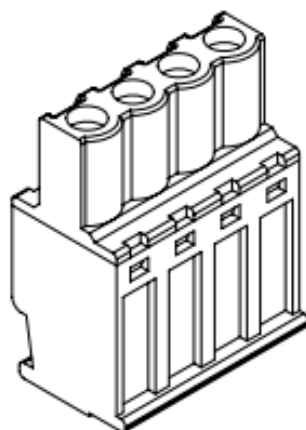


Section A-A


Notes:

1. Pitch:5.0mm ,Poles:2-24P
2. Rated voltage/current:UL 300V/15A
VDE 320V/10A
3. Operation temperatures:-45℃~+105℃
4. Withstanding Voltage:AC2000V/1Min
5. Insulation Resistance:5000Ω/DC1000V
6. Wire Range:28~12AWG, 2.5mm²
7. Max. Torque Value:M2.5, 4.08kgf. cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
	over 6 to 10	over 10 to 24	over 24 to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/0.10

REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		图面更新	CSX	04/18/06
△		工程变更	CSX	11/30/06
△		增加UL刻字	CSX	03/12/07
△		品名、料号增加环保标示“00”	LJH	02/11/07
△		增加VDE、CE刻字	WLM	02/10/07

5	2EDGKA/B-5.0 COVER	1030C0YXXA (H)	1	PA66	UL94V-0
4	2EDGKA/B-CLAMP	1028B00010 (H)	XX	Phosor Bronze	Ni plated
3	2EDG SCREW-M2.5	S000000980 (H) 	XX	Steel	Cr ³⁺ Zn
2	DG128 CAGE	X000000020 (H)	XX	Brass	Ni plated
1	2EDGKA/B-5.0 HOUSING	1030A0YXXA (H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES

DETACHED LISTS			DWG. W/P	DATE 04/22/04	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD
	TOLERANCES EXCEPT AS NOTED		CHKD	DATE	
	 0.1 ± 0.05 ± 0.00 ±		MFO	DATE	
			APPR.	DATE	
	ANGLES ± 1°		MATERIAL :		
			G.E :		
	 THIRD ANGLE PROJECTION		FINISH :		
			SCALE :		
	DO NOT SCALE DRAWING		SHEET 1 OF 1		

NAME 2EDGKA-5.0-XXP-1Y-00A(H)	
DRAWING NO. 2EDGKA-5.0-E01	
/PART NO.	
SIZE A3	REV TS 02/10/07