


# SMT inductors

SIMID series, SIMID 1210-T

## B82422T

SMD

Size 1210 (EIA) or 3225 (IEC)  
Rated inductance 0.010 ... 100  $\mu$ H  
Rated current 60 ... 450 mA



### Construction

- Ceramic or ferrite core
- Laser-welded winding
- Flame-retardant molding

### Features

- High Q factor
- High resonance frequency
- High L value
- Qualified to AEC-Q200
- Suitable for lead-free reflow soldering as referenced in JEDEC J-STD 020D
- RoHS-compatible

### Applications

- Filtering of supply voltages, coupling, decoupling
- Antenna systems
- Automotive electronics
- Telecommunications
- Consumer and data processing equipment
- Industrial electronics

### Terminals

- Base material CuSn6
- Layer composition Cu, Ag, Sn (lead-free)<sup>1)</sup>
- Electro-plated

### Marking

- Marking on component:  
Manufacturer and letter "T", L value (in  $\mu$ H), tolerance of L value (coded), date of manufacture (YWWD)
- Minimum data on reel:  
Manufacturer, ordering code, L value, quantity, date of packing

### Delivery mode and packing units

- 8-mm blister tape, wound on 180-mm or 330-mm  $\varnothing$  reel
- Packing units:  
180-mm reel: 2000 pcs./reel  
330-mm reel: 8000 pcs./reel



**Technical data and measuring conditions**

|  |   |
|--|---|
| Rated inductance $L_R$                 | Measured with impedance analyzer Agilent 4294A at frequency $f_L$ , 0.1 V, +20 °C   |
| Q factor $Q_{min}$                     | Measured with impedance analyzer Agilent 4294A at frequency $f_Q$ , +20 °C  |
| Rated temperature $T_R$                | +85 °C  |
| Rated current $I_R$                    | Maximum permissible DC with inductance decrease $\Delta L/L_0 \leq 10\%$ and temperature increase of $\leq 30$ K at rated temperature |
| Self-resonance frequency $f_{res,min}$ | Measured with impedance analyzer Agilent E4991A / network analyzer Agilent E8362B, +20 °C   |
| DC resistance $R_{max}$                | Measured at +20 °C  |
| Solderability (lead-free)              | Sn95.5Ag3.8Cu0.7: +(245 ±5) °C, (5 ±0.3) s<br>Wetting of soldering area $\geq 90\%$<br>(based on IEC 60068-2-58)                      |
| Resistance to soldering heat           | +260 °C, 40 s (as referenced in JEDEC J-STD 020D)   |
| Climatic category                      | 55/125/56 (to IEC 60068-1)  |
| Storage conditions                     | Mounted: -55 °C ... +125 °C<br>Packaged: -25 °C ... +40 °C, $\leq 75\%$ RH  |
| Weight                                 | Approx. 50 mg   |

**Characteristics and ordering codes**

| $L_R$<br>$\mu\text{H}$ | Tolerance               | $Q_{min}$ | $f_L; f_Q$<br>MHz | $I_R$<br>mA | $R_{max}$<br>$\Omega$ | $f_{res,min}$<br>MHz | Ordering code <sup>1)2)</sup><br>( $\varnothing$ 180-mm reel) |
|------------------------|-------------------------|-----------|-------------------|-------------|-----------------------|----------------------|---|
| Core material: ceramic |                         |           |                   |             |                       |                      |   |
| 0.010                  | $\pm 5\% \triangleq J$  | 15        | 100               | 450         | 0.10                  | 4000                 | B82422T3100+000   |
| 0.012                  | $\pm 10\% \triangleq K$ | 17        | 100               | 450         | 0.11                  | 3500                 | B82422T3120+000   |
| 0.015                  |                         | 19        | 100               | 450         | 0.13                  | 3000                 | B82422T3150+000   |
| 0.018                  |                         | 21        | 100               | 450         | 0.14                  | 2000                 | B82422T3180+000   |
| 0.022                  |                         | 23        | 100               | 450         | 0.16                  | 2000                 | B82422T3220+000   |
| 0.027                  |                         | 23        | 100               | 450         | 0.17                  | 1700                 | B82422T3270+000   |
| 0.033                  |                         | 25        | 100               | 450         | 0.18                  | 1700                 | B82422T3330+000   |
| 0.039                  |                         | 25        | 100               | 450         | 0.19                  | 1300                 | B82422T3390+000   |
| 0.047                  |                         | 26        | 100               | 450         | 0.20                  | 1300                 | B82422T3470+000   |
| 0.056                  |                         | 26        | 100               | 450         | 0.21                  | 1100                 | B82422T3560+000   |
| 0.068                  |                         | 27        | 100               | 450         | 0.23                  | 1000                 | B82422T3680+000   |
| 0.082                  |                         | 27        | 100               | 450         | 0.26                  | 1000                 | B82422T3820+000   |
| 0.10                   |                         | 28        | 100               | 450         | 0.31                  | 900                  | B82422T3101+000   |


Core material: ferrite

|      |                         |    |      |     |      |     |                 |
|------|-------------------------|----|------|-----|------|-----|-----------------|
| 0.12 | $\pm 5\% \triangleq J$  | 30 | 25.2 | 450 | 0.15 | 900 | B82422T1121+000 |
| 0.15 | $\pm 10\% \triangleq K$ | 30 | 25.2 | 450 | 0.18 | 700 | B82422T1151+000 |
| 0.18 |                         | 30 | 25.2 | 450 | 0.19 | 500 | B82422T1181+000 |
| 0.22 |                         | 30 | 25.2 | 450 | 0.20 | 500 | B82422T1221+000 |
| 0.27 |                         | 30 | 25.2 | 450 | 0.21 | 500 | B82422T1271+000 |
| 0.33 |                         | 30 | 25.2 | 450 | 0.23 | 500 | B82422T1331+000 |
| 0.39 |                         | 30 | 25.2 | 450 | 0.25 | 400 | B82422T1391+000 |
| 0.47 |                         | 30 | 25.2 | 450 | 0.30 | 400 | B82422T1471+000 |
| 0.56 |                         | 30 | 25.2 | 450 | 0.31 | 300 | B82422T1561+000 |
| 0.68 |                         | 30 | 25.2 | 450 | 0.34 | 300 | B82422T1681+000 |
| 0.82 |                         | 30 | 25.2 | 450 | 0.38 | 300 | B82422T1821+000 |
| 1.0  |                         | 30 | 7.96 | 400 | 0.6  | 300 | B82422T1102+000 |
| 1.2  |                         | 30 | 7.96 | 390 | 0.7  | 250 | B82422T1122+000 |


### Characteristics and ordering codes

| $L_R$<br>$\mu H$ | Tolerance              | $Q_{min}$               | $f_L; f_Q$<br>MHz | $I_R$<br>mA | $R_{max}$<br>$\Omega$ | $f_{res,min}$<br>MHz | Ordering code <sup>1)2)</sup><br>( $\varnothing$ 180-mm reel) |                 |
|------------------|------------------------|-------------------------|-------------------|-------------|-----------------------|----------------------|---|-----------------|
| 1.5              | $\pm 5\% \triangleq J$ | 30                      | 7.96              | 370         | 0.7                   | 200                  | B82422T1152+000   |                 |
| 1.8              |                        | $\pm 10\% \triangleq K$ | 30                | 7.96        | 350                   | 0.8                  | 140   | B82422T1182+000 |
| 2.2              |                        |                         | 30                | 7.96        | 320                   | 0.8                  | 100   | B82422T1222+000 |
| 2.7              | 30                     |                         | 7.96              | 290         | 0.9                   | 70                   | B82422T1272+000   |                 |
| 3.3              | 30                     |                         | 7.96              | 260         | 1.2                   | 60                   | B82422T1332+000   |                 |
| 3.9              | 30                     |                         | 7.96              | 250         | 1.3                   | 60                   | B82422T1392+000   |                 |
| 4.7              | 30                     |                         | 7.96              | 220         | 1.5                   | 50                   | B82422T1472+000   |                 |
| 5.6              | 27                     |                         | 7.96              | 200         | 1.6                   | 45                   | B82422T1562+000   |                 |
| 6.8              | 27                     |                         | 7.96              | 180         | 1.8                   | 40                   | B82422T1682+000   |                 |
| 8.2              | 27                     |                         | 7.96              | 170         | 2.0                   | 35                   | B82422T1822+000   |                 |
| 10               | 27                     |                         | 2.52              | 150         | 2.1                   | 30                   | B82422T1103+000   |                 |
| 12               | 27                     |                         | 2.52              | 140         | 2.5                   | 25                   | B82422T1123+000   |                 |
| 15               | 27                     |                         | 2.52              | 130         | 2.8                   | 20                   | B82422T1153+000   |                 |
| 18               | 27                     |                         | 2.52              | 120         | 3.0                   | 20                   | B82422T1183+000   |                 |
| 22               | 27                     |                         | 2.52              | 110         | 3.5                   | 20                   | B82422T1223+000   |                 |
| 27               | 27                     | 2.52                    | 80                | 4.5         | 20                    | B82422T1273+000      |   |                 |
| 33               | 27                     | 2.52                    | 70                | 5.6         | 17                    | B82422T1333+000      |   |                 |
| 39               | 27                     | 2.52                    | 65                | 6.4         | 16                    | B82422T1393+000      |   |                 |
| 47               | 27                     | 2.52                    | 60                | 7.0         | 15                    | B82422T1473+000      |   |                 |
| 56               | 27                     | 2.52                    | 60                | 8.0         | 12                    | B82422T1563+000      |   |                 |
| 68               | 27                     | 2.52                    | 60                | 9.0         | 9                     | B82422T1683+000      |   |                 |
| 82               | 25                     | 2.52                    | 60                | 10          | 9                     | B82422T1823+000      |   |                 |
| 100              | 20                     | 0.796                   | 60                | 11          | 8                     | B82422T1104+000      |   |                 |


**Impedance  $|Z|$  versus frequency  $f$**   
 measured with impedance analyzer  
 Agilent E4991A, typical values at +20 °C

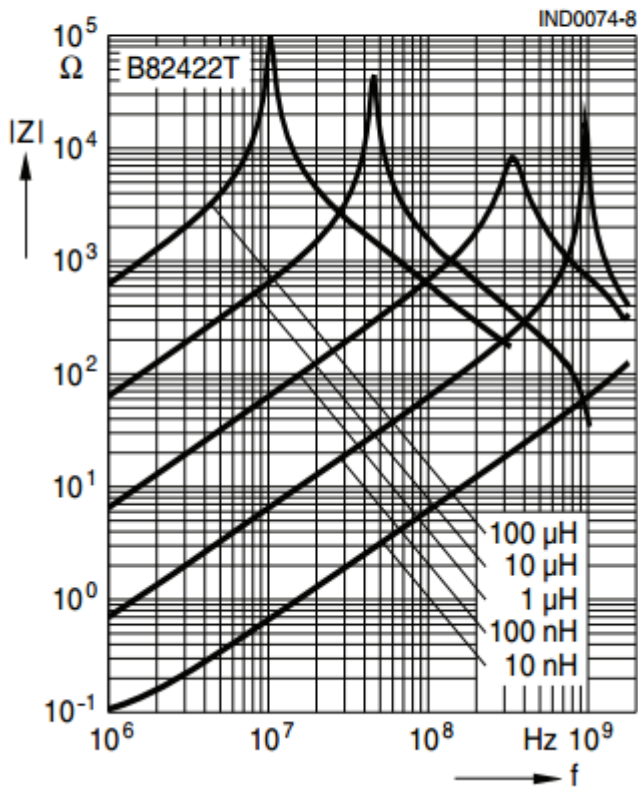

**Inductance  $L$  versus DC load current  $I_{DC}$**   
 measured with LCR meter Agilent 4285A,  
 typical values at +20 °C

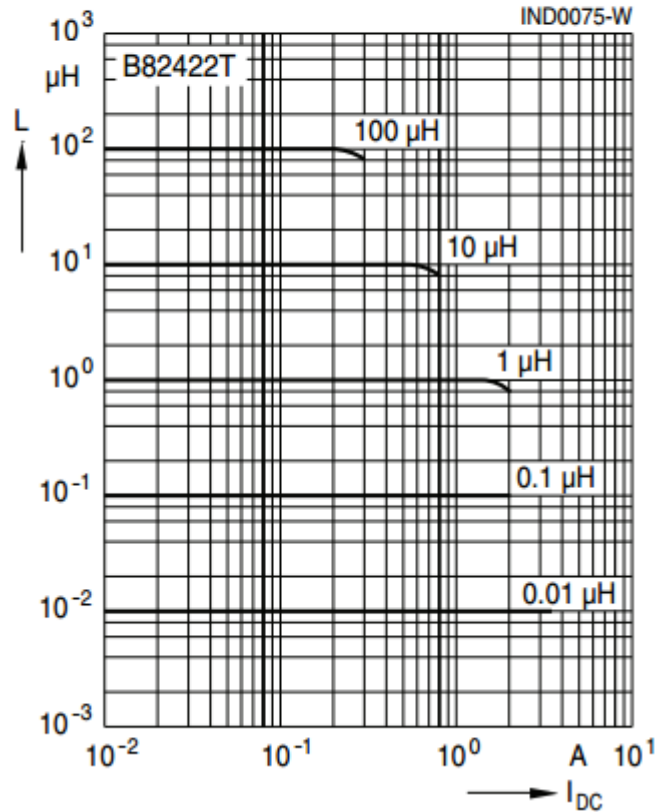

**Q factor versus frequency  $f$**   
 measured with impedance analyzer Agilent  
 E4991A, typical values at +20 °C

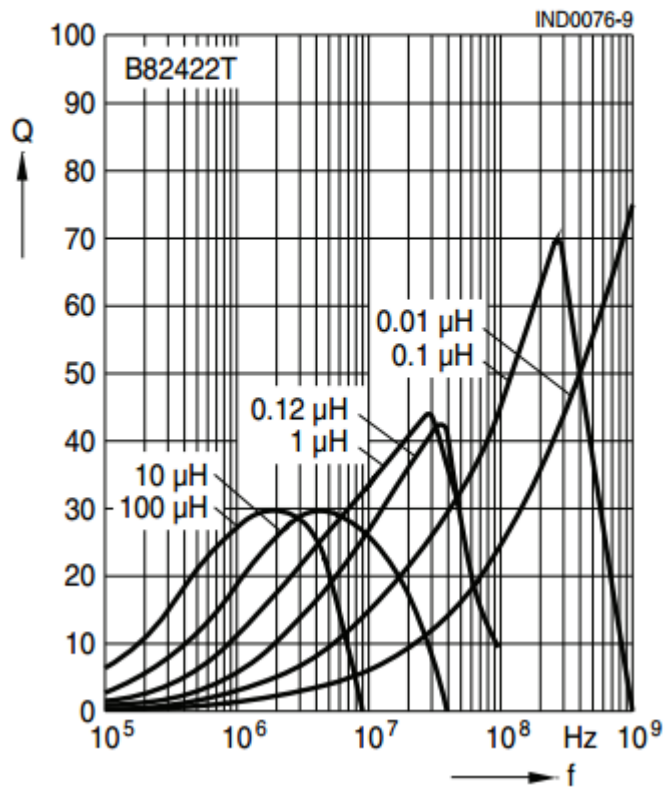

**Current derating  $I_{op}/I_R$**   
**versus ambient temperature  $T_A$**   
 (rated temperature  $T_R = +85$  °C)

