

МИНИАТЮРНЫЕ ТУМБЛЕРЫ

Условное обозначение:


Пример: **MTS-102-A 1**

MTS - тип
1 - количество контактных групп
02 - количество контактов в группе
A - варианты рычажка
1 - варианты выводов


Технические характеристики:

Номинальные значения:
 10А 125 В / 6А 250 В пер.тока
Контактное сопротивление:
 20 МОм макс.
Сопротивление изоляции:
 100МО мин. (500В пост.тока)
Электрическая прочность диэлектрика:
 1500 в пер.тока за1 минуту
Рабочая температура:
 от -55 С до 85 С
Электрический ресурс:
 20 000 циклов


MTS-101 ON-OFF
SPST 2P

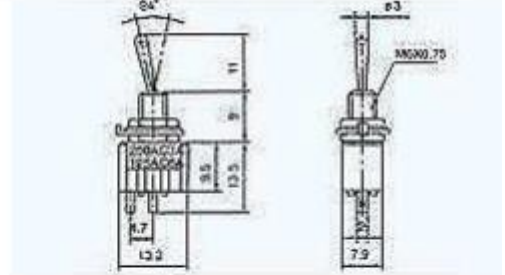


MTS-102 ON-ON
MTS-112 ON-(ON)
MTS-103 ON-OFF-ON
MTS-113 ON-OFF-(ON)
MTS-123 (ON)-OFF-(ON)
SPDT 3P

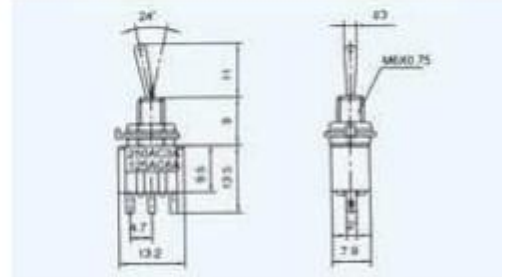


MTS-201 ON-OFF
DPST 4P

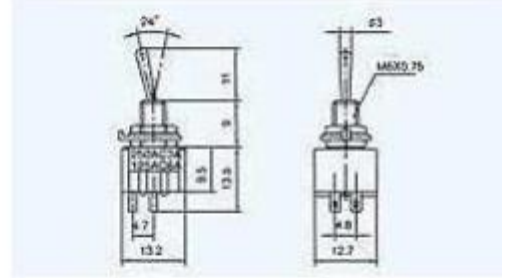


MTS-202 ON-ON
MTS-212 ON-(ON)
MTS-203 ON-OFF-ON
MTS-213 ON-OFF-(ON)
MTS-223 (ON)-OFF-(ON)
DPDT 6P

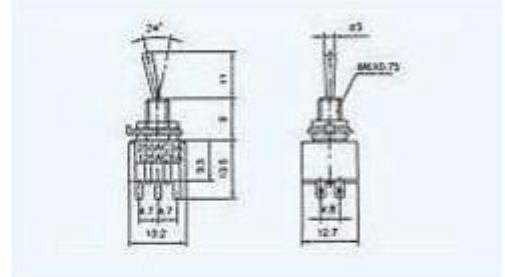


MTS-101-A2 ON-OFF
SPST 2P

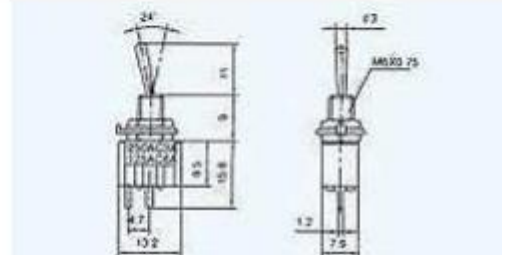



MTS-102-A2 ON-ON
 MTS-112-A2 ON-(ON)
 MTS-103-A2 ON-OFF-ON
 MTS-113 -A2 ON-OFF-(ON)
 MTS-123-A2 (ON)-OFF-(ON)
 SPDT 3P

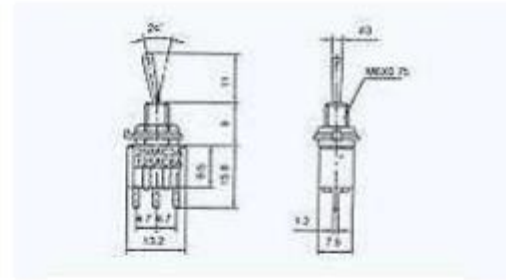



MTS-201-A2 ON-OFF
 DPST 4P

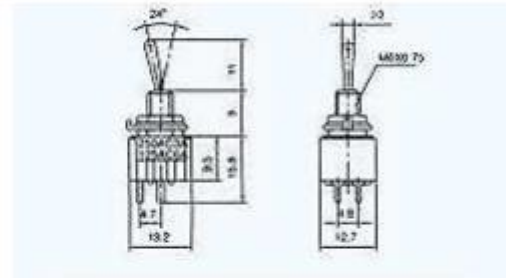



MTS-202-A2 ON-ON
 MTS-212-A2 ON-(ON)
 MTS-203-A2 ON-OFF-ON
 MTS-213 -A2 ON-OFF-(ON)
 MTS-223-A2 (ON)-OFF-(ON)
 DPDT 6P

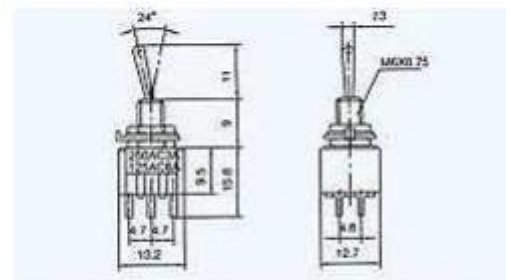


MTS-102-A2T ON-ON
 MTS-112-A2T ON-(ON)
 MTS-103-A2T ON-OFF-ON
 MTS-113 -A2T ON-OFF-(ON)
 MTS-123-A2T (ON)-OFF-(ON)
 SPDT 3P

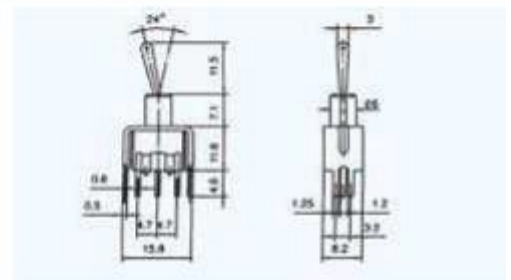


MTS-202-A2T ON-ON
 MTS-212-A2T ON-(ON)
 MTS-203-A2T ON-OFF-ON
 MTS-213 -A2T ON-OFF-(ON)
 MTS-223-A2T (ON)-OFF-(ON)
 DPDT 6P

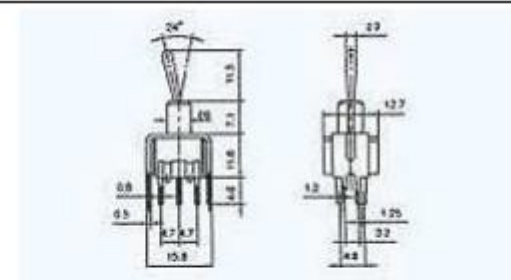


MTS-102-C3 ON-ON
 MTS-112-C3 ON-(ON)
 MTS-103-C3 ON-OFF-ON
 MTS-113 -C3 ON-OFF-(ON)
 MTS-123-C3 (ON)-OFF-(ON)
 SPDT 3P

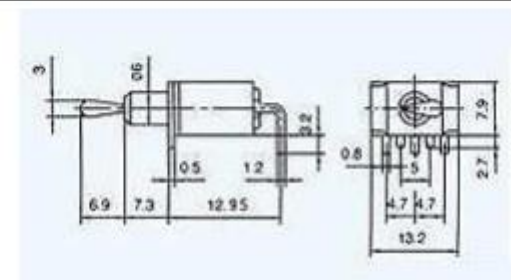


MTS-202-C3 ON-ON
 MTS-212-C3 ON-(ON)
 MTS-203-C3 ON-OFF-ON
 MTS-213 -C3 ON-OFF-(ON)
 MTS-223-C3 (ON)-OFF-(ON)
 SPDT 6P

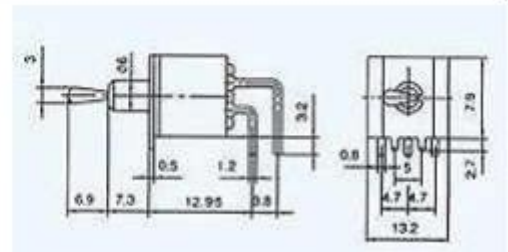



MTS-102-C4 ON-ON
 MTS-112-C4 ON-(ON)
 MTS-103-C4 ON-OFF-ON
 MTS-113 -C4 ON-OFF-(ON)
 MTS-123-C4 (ON)-OFF-(ON)
 SPDT 3P

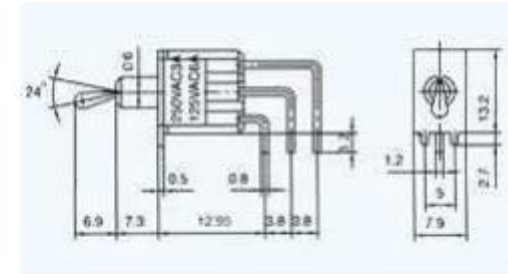


MTS-202-C4 ON-ON
 MTS-212-C4 ON-(ON)
 MTS-203-C4 ON-OFF-ON
 MTS-213 -C4 ON-OFF-(ON)
 MTS-223-C4 (ON)-OFF-(ON)
 DPDT 6P

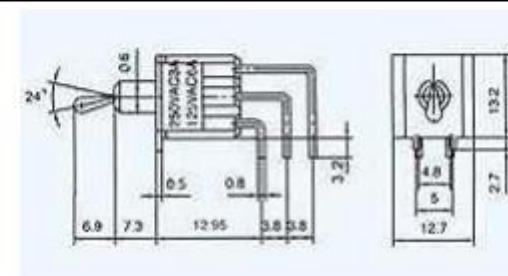


MTS-101-E1 ON-OFF
 SPST 2P
 (PLASTIC FLATLEVER)

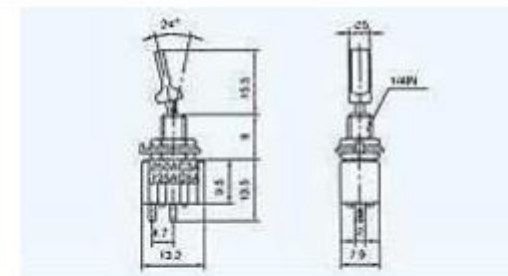


MTS-102-E1 ON-ON
 MTS-112-E1 ON-(ON)
 MTS-103-E1 ON-OFF-ON
 MTS-113 -E1 ON-OFF-(ON)
 MTS-123-E1 (ON)-OFF-(ON)
 SPDT 3P
 (PLASTIC FLATLEVER)

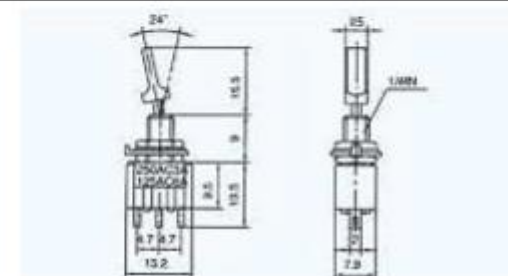


MTS-202-E1 ON-ON
 MTS-212-E1 ON-(ON)
 MTS-203-E1 ON-OFF-ON
 MTS-213 -E1 ON-OFF-(ON)
 MTS-223-E1 (ON)-OFF-(ON)
 DPDT 6P
 (PLASTIC FLATLEVER)

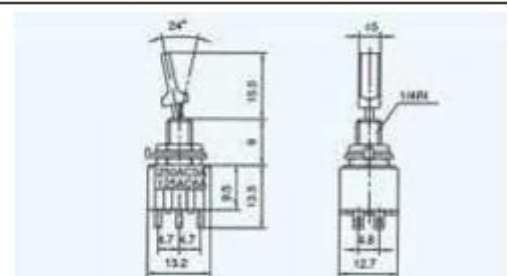


MTS-101-F1 ON-OFF
SPST 2P
(METAL FLATLEVER)

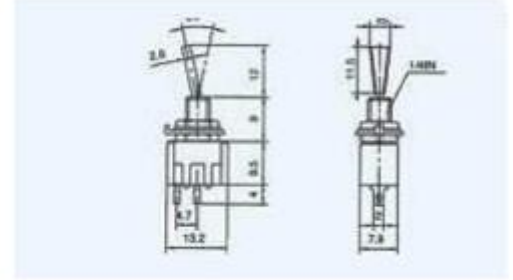


MTS-102-F1 ON-ON
MTS-112-F1 ON-(ON)
MTS-103-F1 ON-OFF-ON
MTS-113 -F1 ON-OFF-(ON)
MTS-123-F1 (ON)-OFF-(ON)
SPDT 3P
(METAL FLATLEVER)

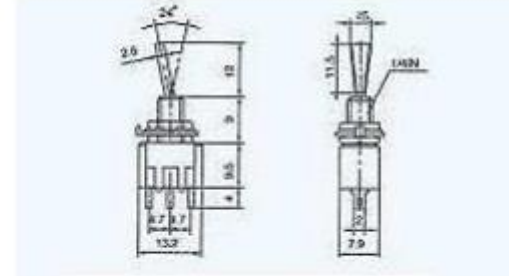


MTS-202-F1 ON-ON
MTS-212-F1 ON-(ON)
MTS-203-F1 ON-OFF-ON
MTS-213 -F1 ON-OFF-(ON)
MTS-223-F1 (ON)-OFF-(ON)
DPDT 6P
(METAL FLATLEVER)

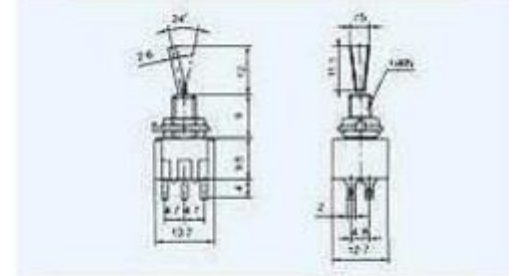


KNX-1 ON-ON
KNX-103 ON-OFF-ON
SPDT 3P

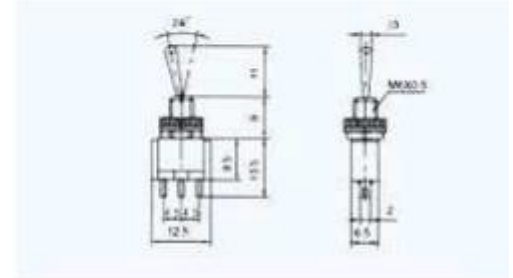


KNX-2 ON-ON
KNX-203 ON-OFF-ON
DPDT 6P

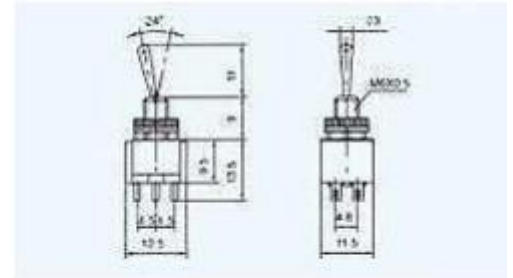


STM-101 ON-OFF
SPST 2P

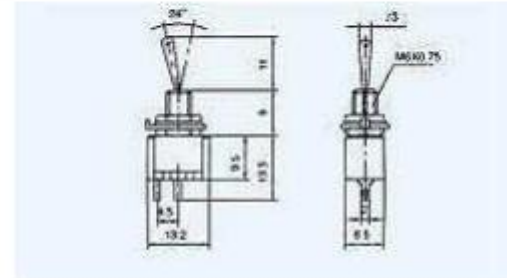


STM-102 ON-ON
 STM-112 ON-(ON)
 STM-103 ON-OFF-ON
 STM-113 ON-OFF-(ON)
 STM-123 (ON)-OFF-(ON)
 SPDT 3P

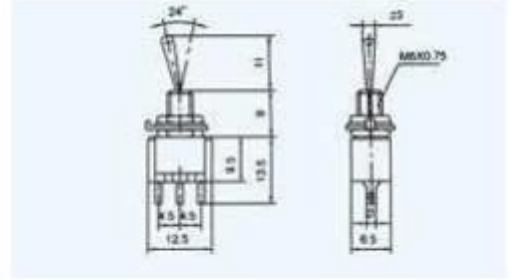

STM-202 ON-ON
 STM-212 ON-(ON)
 STM-203 ON-OFF-ON
 STM-213 ON-OFF-(ON)
 STM-223 (ON)-OFF-(ON)
 DPDT 6P

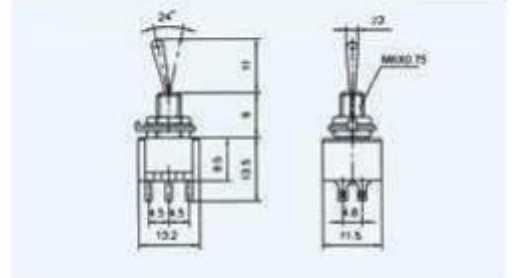

MTS-101 ON-OFF
 SPST 2P

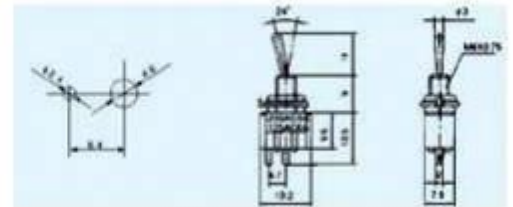

STM-202-A3 ON-ON
 STM-212-A3 ON-(ON)
 STM-203-A3 ON-OFF-ON
 STM-213-A3 ON-OFF-(ON)
 STM-223-A3 (ON)-OFF-(ON)
 DPDT 6P

